

DC Brushless Fan

120X120X38 mm


IP68 Rating , Dustproof & Waterproof

iWATER Fan Series
IEC 60068-2-52 standard
RoHS compliant




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Ball bearings
- Control Options: +/-/FG/PWM
- Weight: 342g
- Lead Wires : UL10368 AWG22 OR Equivalent

■ Air Flow-Static Pressure Characteristics

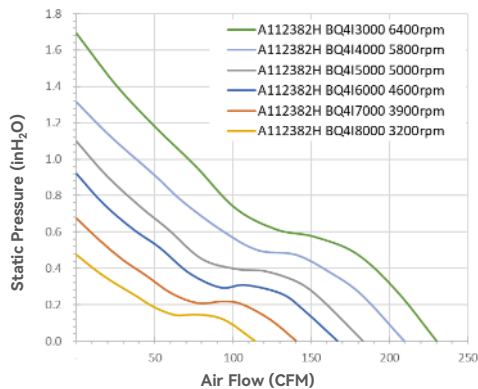

■ Dimensions drawing (mm)

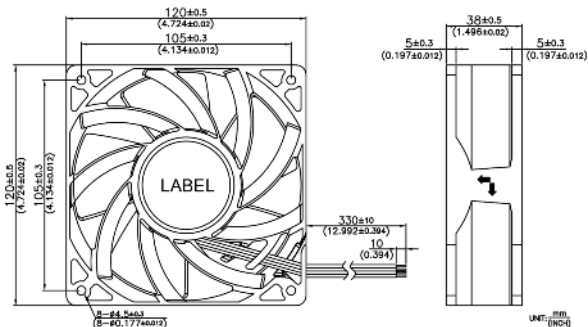

IP68 Rating Model No.		Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise @1M
		VDC	VDC	°C	RPM	Amp	Watt	CFM	m³/min	inH₂O	mmH₂O	dB(A)
A112381H	BQ4I6000	12	7~13.8	-10~70	4600	1.33	15.9	166.4	4.7	0.92	23.4	58.4
A112381H	BQ4I7000	12	7~13.8	-10~70	3900	0.81	9.7	140.2	4.0	0.67	17.1	53.6
A112381H	BQ4I8000	12	7~13.8	-10~70	3200	0.45	5.4	114.0	3.2	0.47	12.1	48.4
A112382H	BQ4I3000	24	14~27.6	-10~70	6400	1.87	44.9	233.2	6.6	1.68	42.8	67.0
A112382H	BQ4I4000	24	14~27.6	-10~70	5800	1.33	31.9	209.2	5.9	1.40	35.5	64.2
A112382H	BQ4I5000	24	14~27.6	-10~70	5000	0.90	21.6	183.1	5.2	1.10	27.9	60.8
A112382H	BQ4I6000	24	14~27.6	-10~70	4600	0.66	15.9	166.4	4.7	0.92	23.4	58.4
A112382H	BQ4I7000	24	14~27.6	-10~70	3900	0.40	9.7	140.2	4.0	0.67	17.1	53.6
A112382H	BQ4I8000	24	14~27.6	-10~70	3200	0.22	5.4	114.0	3.2	0.47	12.1	48.4

Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.
<https://www.i-hzlw.com>

DC Brushless Fan

120X120X38 mm


for Salt Spray Environment

iSALT Fan Series
IEC 60068-2-52 standard
RoHS compliant




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Ball bearings
- Control Options: +/-/FG/PWM
- Weight: 342g
- Lead Wires : UL10368 AWG22 OR Equivalent

■ Air Flow-Static Pressure Characteristics

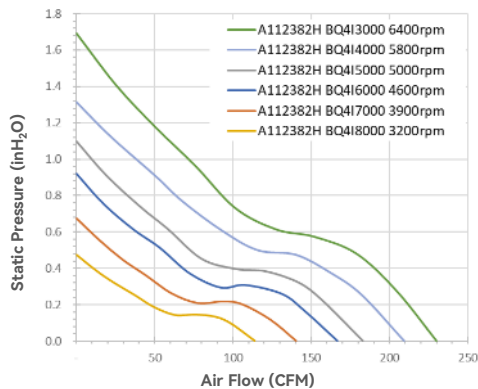

■ Dimensions drawing (mm)

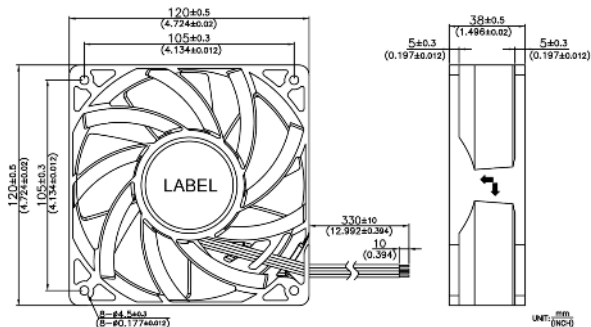

for salt spray environment Model No.		Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise @1M
		VDC	VDC	°C	RPM	Amp	Watt	CFM	m ³ /min	inH ₂ O	mmH ₂ O	dB(A)
A112381H	BQ4F6000	12	7~13.8	-10~70	4600	1.33	15.9	166.4	4.7	0.92	23.4	58.4
A112381H	BQ4F7000	12	7~13.8	-10~70	3900	0.81	9.7	140.2	4.0	0.67	17.1	53.6
A112381H	BQ4F8000	12	7~13.8	-10~70	3200	0.45	5.4	114.0	3.2	0.47	12.1	48.4
A112382H	BQ4F3000	24	14~27.6	-10~70	6400	1.87	44.9	233.2	6.6	1.68	42.8	67.0
A112382H	BQ4F4000	24	14~27.6	-10~70	5800	1.33	31.9	209.2	5.9	1.40	35.5	64.2
A112382H	BQ4F5000	24	14~27.6	-10~70	5000	0.90	21.6	183.1	5.2	1.10	27.9	60.8
A112382H	BQ4F6000	24	14~27.6	-10~70	4600	0.66	15.9	166.4	4.7	0.92	23.4	58.4
A112382H	BQ4F7000	24	14~27.6	-10~70	3900	0.40	9.7	140.2	4.0	0.67	17.1	53.6
A112382H	BQ4F8000	24	14~27.6	-10~70	3200	0.22	5.4	114.0	3.2	0.47	12.1	48.4

* All models are available with GR487 customization options; please contact HUAZHUN sales for details.