

DC Brushless Fan

60X60X38 mm


IP68 Rating , Dustproof & Waterproof
for Salt Spray Environment
12V

iWATER Fan Series
iSALT Fan Series
IEC 60068-2-52 standard
RoHS compliant




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Ball bearings
- Control Options: +/-FG/PWM
- Weight: 148 g
- Lead Wires : UL10368 AWG22 OR Equivalent

■ Air Flow-Static Pressure Characteristics

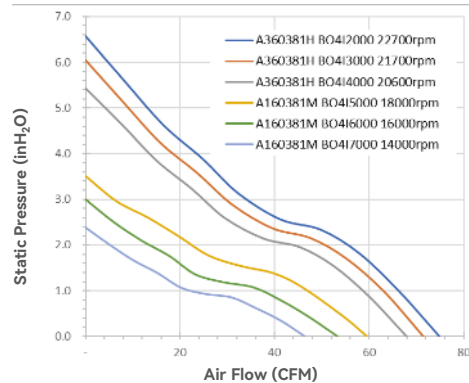

■ Dimensions drawing (mm)

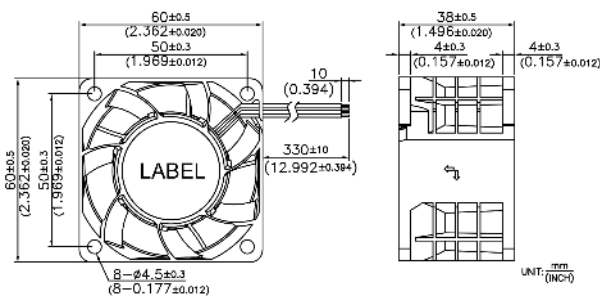

IP68 Rating		Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise @1M
Model No.		VDC	VDC	°C	RPM	Amp	Watt	CFM	m ³ /min	inH ₂ O	mmH ₂ O	dB(A)
A360381H	BO4I2000	12	10~13.8	-10~70	22700	3.16	37.9	73.5	2.08	7.0	177.2	70.6
A360381H	BO4I3000	12	10~13.8	-10~70	21700	2.73	32.7	70.1	1.98	6.3	161.3	68.8
A360381H	BO4I4000	12	10~13.8	-10~70	20600	2.64	31.7	66.2	1.87	5.9	149.4	67.7
A160381M	BO4I5000	12	6~13.8	-10~70	18000	1.61	19.3	60.0	1.70	3.9	98.6	65.1
A160381M	BO4I6000	12	6~13.8	-10~70	16000	1.26	15.1	53.4	1.51	2.9	73.6	62.4
A160381M	BO4I7000	12	6~13.8	-10~70	14000	0.78	9.4	46.2	1.31	2.6	65.8	59.1

for salt spray environment		Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise @1M
Model No.		VDC	VDC	°C	RPM	Amp	Watt	CFM	m ³ /min	inH ₂ O	mmH ₂ O	dB(A)
A360381H	BO4F2000	12	10~13.8	-10~70	22700	3.16	37.9	73.5	2.08	7.0	177.2	70.6
A360381H	BO4F3000	12	10~13.8	-10~70	21700	2.73	32.7	70.1	1.98	6.3	161.3	68.8
A360381H	BO4F4000	12	10~13.8	-10~70	20600	2.64	31.7	66.2	1.87	5.9	149.4	67.7
A160381M	BO4F5000	12	6~13.8	-10~70	18000	1.61	19.3	60.0	1.70	3.9	98.6	65.1
A160381M	BO4F6000	12	6~13.8	-10~70	16000	1.26	15.1	53.4	1.51	2.9	73.6	62.4
A160381M	BO4F7000	12	6~13.8	-10~70	14000	0.78	9.4	46.2	1.31	2.6	65.8	59.1

* All models are available with GR487 customization options; please contact HUAZHUN sales for details.

Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.
<https://www.i-hzlw.com>

DC Brushless Fan

60X60X38 mm


IP68 Rating , Dustproof & Waterproof
for Salt Spray Environment
24V

iWATER Fan Series
iSALT Fan Series
IEC 60068-2-52 standard
RoHS compliant




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Ball bearings
- Control Options: +/-FG/PWM
- Weight: 148 g
- Lead Wires : UL10368 AWG22 OR Equivalent

■ Air Flow-Static Pressure Characteristics

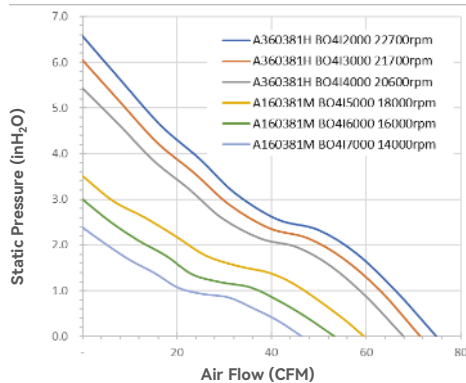

■ Dimensions drawing (mm)

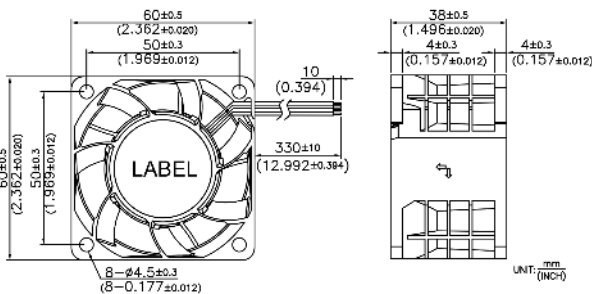

IP68 Rating		Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise @1M
Model No.		VDC	VDC	°C	RPM	Amp	Watt	CFM	m ³ /min	inH ₂ O	mmH ₂ O	dB(A)
A160382H	BO4I2000	24	14~27.6	-10~70	22700	1.58	37.9	73.5	2.08	7.0	177.2	70.6
A160382H	BO403000	24	14~27.6	-10~70	21700	1.36	32.7	70.1	1.98	6.3	161.3	68.8
A160382H	BO4I4000	24	14~27.6	-10~70	20600	1.32	31.7	66.2	1.87	5.9	149.4	67.7
A160382H	BO4I5000	24	14~27.6	-10~70	18000	0.81	19.3	60.0	1.70	3.9	98.6	65.1
A160382H	BO4I6000	24	14~27.6	-10~70	16000	0.63	15.1	53.4	1.51	2.9	73.6	62.4
A160382H	BO4I7000	24	14~27.6	-10~70	14000	0.39	9.4	46.2	1.31	2.6	65.8	59.1

for salt spray environment		Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise @1M
Model No.		VDC	VDC	°C	RPM	Amp	Watt	CFM	m ³ /min	inH ₂ O	mmH ₂ O	dB(A)
A160382H	BO4F2000	24	14~27.6	-10~70	22700	1.58	37.9	73.5	2.08	7.0	177.2	70.6
A160382H	BO4F3000	24	14~27.6	-10~70	21700	1.36	32.7	70.1	1.98	6.3	161.3	68.8
A160382H	BO4F4000	24	14~27.6	-10~70	20600	1.32	31.7	66.2	1.87	5.9	149.4	67.7
A160382H	BO4F5000	24	14~27.6	-10~70	18000	0.81	19.3	60.0	1.70	3.9	98.6	65.1
A160382H	BO4F6000	24	14~27.6	-10~70	16000	0.63	15.1	53.4	1.51	2.9	73.6	62.4
A160382H	BO4F7000	24	14~27.6	-10~70	14000	0.39	9.4	46.2	1.31	2.6	65.8	59.1

* All models are available with GR487 customization options; please contact HUAZHUN sales for details.

Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.
<https://www.i-hzlw.com>