

DC Brushless Fan

80X80X38 mm


IP68 Rating , Dustproof & Waterproof
for Salt Spray Environment
12V

iWATER Fan Series
iSALT Fan Series
IEC 60068-2-52 standard
RoHS compliant




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Ball bearings
- Control Options: +/-FG/PWM
- Weight: 148 g
- Lead Wires : UL10368 AWG22 OR Equivalent

■ Air Flow-Static Pressure Characteristics

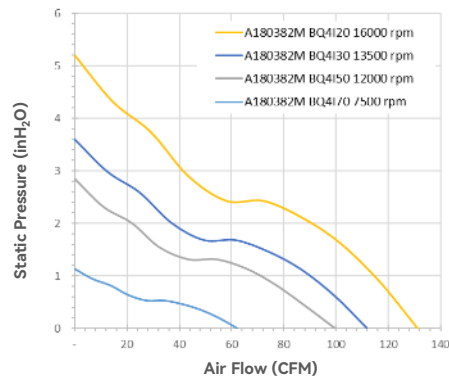

■ Dimensions drawing (mm)

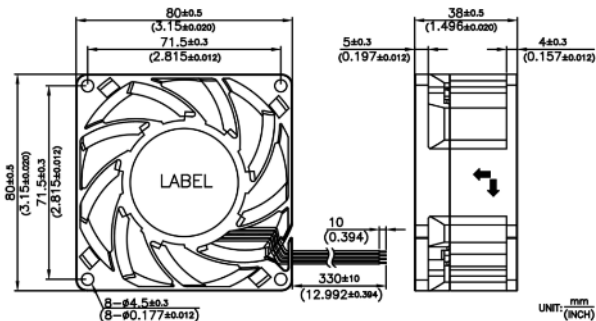

IP68 Rating		Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise @1M
Model No.		VDC	VDC	°C	RPM	Amp	Watt	CFM	m ³ /min	inH ₂ O	mmH ₂ O	dB(A)
A380381H	BQ4I20	12	10~13.8	-10~70	16000	4.40	52.8	131.3	3.7	5.20	132.0	73.2
A180381H	BQ4I30	12	7~13.8	-10~70	13500	2.40	28.8	111.9	3.2	3.60	91.3	70.3
A180381M	BQ4I50	12	7~13.8	-10~70	12000	1.80	21.6	99.5	2.8	2.84	72.2	65.5
A180381M	BQ4I70	12	7~13.8	-10~70	7500	0.50	6.00	62.1	1.8	1.14	28.8	55.0

for salt spray environment		Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise @1M
Model No.		VDC	VDC	°C	RPM	Amp	Watt	CFM	m ³ /min	inH ₂ O	mmH ₂ O	dB(A)
A380381H	BQ4F20	12	10~13.8	-10~70	16000	4.40	52.8	131.3	3.7	5.20	132.0	73.2
A180381H	BQ4F30	12	7~13.8	-10~70	13500	2.40	28.8	111.9	3.2	3.60	91.3	70.3
A180381M	BQ4F50	12	7~13.8	-10~70	12000	1.80	21.6	99.5	2.8	2.84	72.2	65.5
A180381M	BQ4F70	12	7~13.8	-10~70	7500	0.50	6.00	62.1	1.8	1.14	28.8	55.0

* All models are available with GR487 customization options; please contact HUAZHUN sales for details.

Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.
<https://www.i-hzlw.com>

DC Brushless Fan

80X80X38 mm


IP68 Rating , Dustproof & Waterproof
for Salt Spray Environment
24V

iWATER Fan Series
iSALT Fan Series
IEC 60068-2-52 standard
RoHS compliant




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Ball bearings
- Control Options: +/-/FG/PWM
- Weight: 148 g
- Lead Wires : UL10368 AWG22 OR Equivalent

■ Air Flow-Static Pressure Characteristics

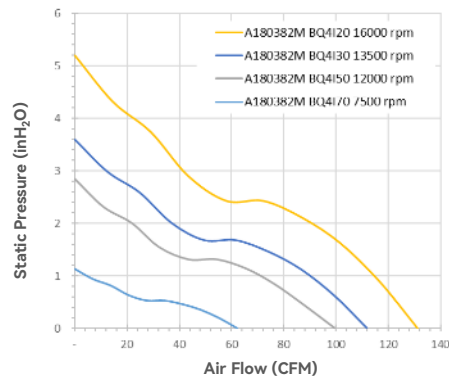

■ Dimensions drawing (mm)

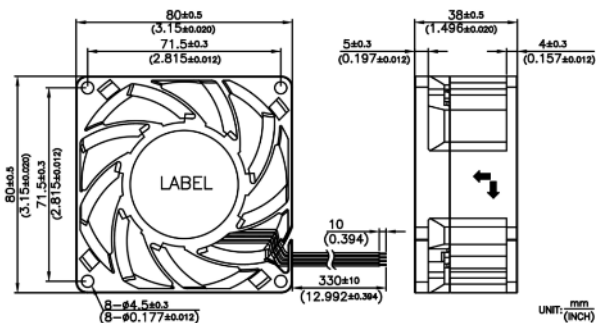

IP68 Rating		Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise @1M
Model No.		VDC	VDC	°C	RPM	Amp	Watt	CFM	m ³ /min	inH ₂ O	mmH ₂ O	dB(A)
A180382M	BQ4I20	24	14~27.6	-10~70	16000	2.20	52.8	131.3	3.7	5.20	132.0	73.2
A180382M	BQ4I30	24	14~27.6	-10~70	13500	1.20	28.8	111.9	3.2	3.60	91.3	70.3
A180382M	BQ4I50	24	14~27.6	-10~70	12000	0.90	21.6	99.5	2.8	2.84	72.2	65.5
A180382M	BQ4I70	24	14~27.6	-10~70	7500	0.25	6.00	62.1	1.8	1.14	28.8	55.0

for salt spray environment		Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise @1M
Model No.		VDC	VDC	°C	RPM	Amp	Watt	CFM	m ³ /min	inH ₂ O	mmH ₂ O	dB(A)
A180382M	BQ4F20	24	14~27.6	-10~70	16000	2.20	52.8	131.3	3.7	5.20	132.0	73.2
A180382M	BQ4F30	24	14~27.6	-10~70	13500	1.20	28.8	111.9	3.2	3.60	91.3	70.3
A180382M	BQ4F50	24	14~27.6	-10~70	12000	0.90	21.6	99.5	2.8	2.84	72.2	65.5
A180382M	BQ4F70	24	14~27.6	-10~70	7500	0.25	6.00	62.1	1.8	1.14	28.8	55.0

* All models are available with GR487 customization options; please contact HUAZHUN sales for details.

Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.
<https://www.i-hzlw.com>