

DC Brushless Blower

30X30X10 mm


Low Noise , High Operating Temperature 95 °C

iCar Fan Series
RoHS compliant
IATF 16949 Certification
AEC-Q




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Hydraulic bearings
- Control Options: +/-/FG/PWM
- Weight: 8.1 g

■ Air Flow-Static Pressure Characteristics

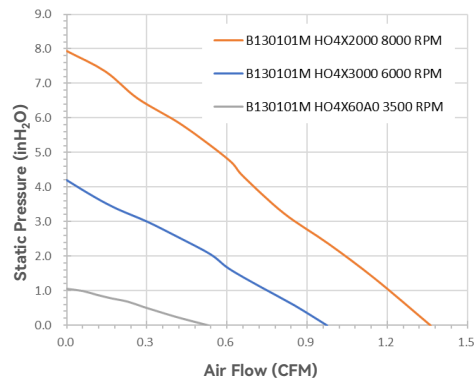

■ Dimensions drawing (mm)

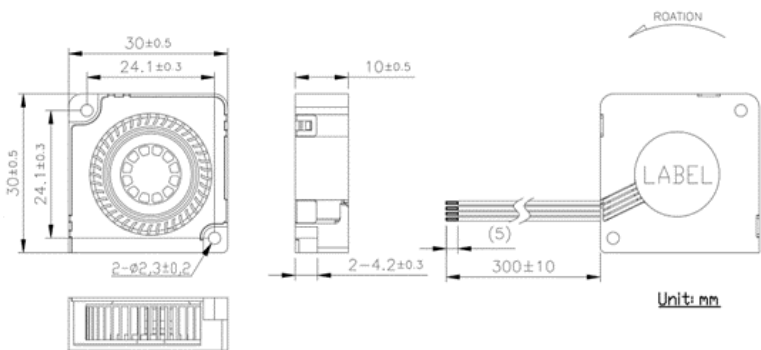

Model No.		Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise @10CM
		VDC	VDC	°C	RPM	Amp	Watt	CFM	m³/min	inH₂O	mmH₂O	dB(A)
B130100M	HO4X2000	5	4~6	-20~95	8000	0.160	0.80	1.36	0.039	0.313	7.95	29.8
B130100M	HO4X3000	5	4~6	-20~95	6000	0.086	0.43	0.98	0.028	0.165	4.20	22.5
B130100M	HO4X60A0	5	4~6	-20~95	3500	0.032	0.16	0.53	0.015	0.046	1.06	16.1
B130101M	HO4X2000	12	8~16	-20~95	8000	0.067	0.80	1.36	0.039	0.313	7.95	29.8
B130101M	HO4X3000	12	8~16	-20~95	6000	0.036	0.43	0.98	0.028	0.165	4.20	22.5
B130101M	HO4X60A0	12	8~16	-20~95	3500	0.013	0.16	0.53	0.015	0.046	1.06	16.1

AEC-Q Model No.		Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise @10CM
		VDC	VDC	°C	RPM	Amp	Watt	CFM	m³/min	inH₂O	mmH₂O	dB(A)
B130100M	HO4T2000	5	4~6	-20~95	8000	0.160	0.80	1.36	0.039	0.313	7.95	29.8
B130100M	HO4T3000	5	4~6	-20~95	6000	0.086	0.43	0.98	0.028	0.165	4.20	22.5
B130100M	HO4T60A0	5	4~6	-20~95	3500	0.032	0.16	0.53	0.015	0.046	1.06	16.1
B130101M	HO4T2000	12	8~16	-20~95	8000	0.067	0.80	1.36	0.039	0.313	7.95	29.8
B130101M	HO4T3000	12	8~16	-20~95	6000	0.036	0.43	0.98	0.028	0.165	4.20	22.5
B130101M	HO4T60A0	12	8~16	-20~95	3500	0.013	0.16	0.53	0.015	0.046	1.06	16.1

Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.
<https://www.i-hzlw.com>