



iWater Fan 40*40*10 MM IP68 Rating

Dustproof & Waterproof Fan Series

DIMENSION DRAWING

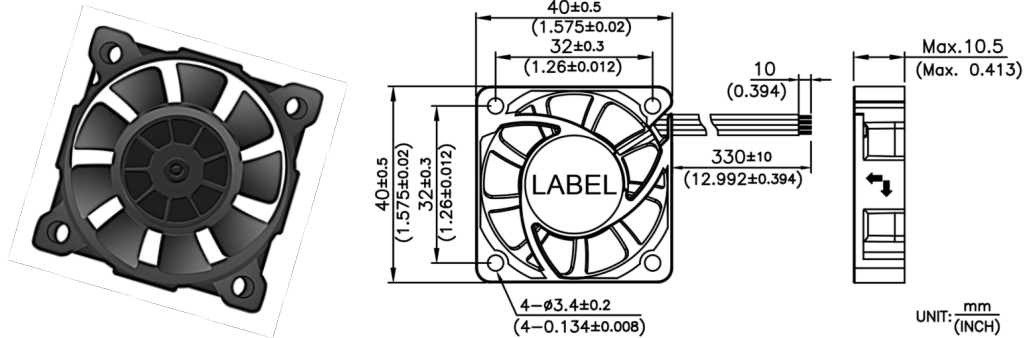

Housing : Plastic (UL 94V-0)
 Impeller : Plastic (UL 94V-0)
 Bearing : BALL Bearing
 Lead Wires : UL1007 AWG26 OR Equivalent
 Mass : 16g

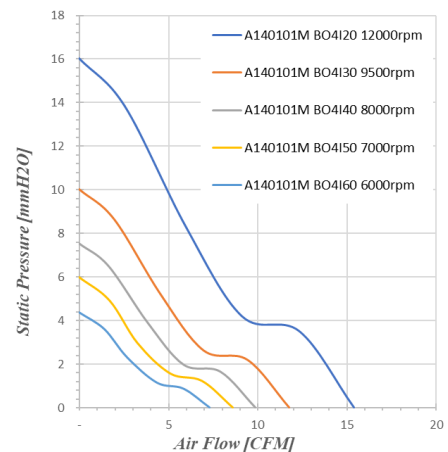

Product Type	Model No.		Control Type	Bearing Type	Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise
					VDC	VDC	°C	R.P.M	Amp	Watt	CFM	m ³ /min	inH ₂ O	mmH ₂ O	
4010 12V IP68 Series	A140101M	BO4I20	+/-FG/PWM	Ball	12	7~13.8	10~70	12000	0.225	2.70	15.4	0.44	0.63	16.0	44.1
	A140101M	BO4I30	+/-FG/PWM	Ball	12	7~13.8	10~70	9500	0.115	1.38	11.7	0.33	0.40	10.0	40.8
	A140101M	BO4I40	+/-FG/PWM	Ball	12	7~13.8	10~70	8000	0.085	1.02	9.8	0.28	0.30	7.5	36.4
	A140101M	BO4I50	+/-FG/PWM	Ball	12	7~13.8	10~70	7000	0.062	0.74	8.3	0.23	0.24	6.0	32.1
	A140101M	BO4I60	+/-FG/PWM	Ball	12	7~13.8	10~70	6000	0.048	0.58	7.3	0.21	0.17	4.4	28.6
4010 5V IP68 Series	A140100M	BO4I20	+/-FG/PWM	Ball	5	4.5~5.5	-10~70	12000	0.540	2.70	15.4	0.44	0.63	16.0	44.1
	A140100M	BO4I30	+/-FG/PWM	Ball	5	4.5~5.5	-10~70	9500	0.276	1.38	11.7	0.33	0.40	10.0	40.8
	A140100M	BO4I40	+/-FG/PWM	Ball	5	4.5~5.5	-10~70	8000	0.204	1.02	9.8	0.28	0.30	7.5	36.4
	A140100M	BO4I50	+/-FG/PWM	Ball	5	4.5~5.5	-10~70	7000	0.149	0.74	8.6	0.24	0.24	6.0	32.1
	A140100M	BO4I60	+/-FG/PWM	Ball	5	4.5~5.5	-10~70	6000	0.115	0.58	7.3	0.21	0.17	4.4	28.6