



iWater & iSALT Fan 50*50*15 MM IP68 Rating Dustproof & Waterproof & SALT FOG Proof Fan Series

DIMENSION DRAWING

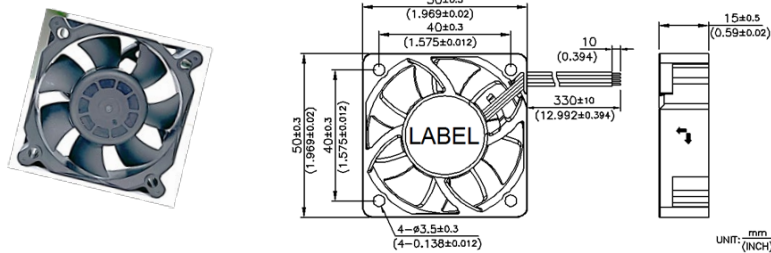

Housing : Plastic (UL 94V-0)
 Impeller : Plastic (UL 94V-0)
 Bearing : Ball bearing
 Lead Wires : UL10368 AWG26 OR Equivalent
 Mass : 35.3g

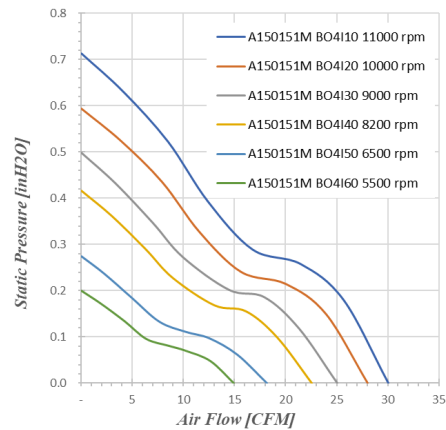

Product Type	Model No.		Control Type	Bearing Type	Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise
					VDC	VDC	°C	R.P.M	Amp	Watt	CFM	m³/min	inH2O	mmH2O	
5015 12V IP68 Series	A150151M	BO4I10	+/-FG/PWM	Ball	12	6~13.8	-10~70	11000	0.417	5.0	30.0	0.85	0.71	18.1	49.6
	A150151M	BO4I20	+/-FG/PWM	Ball	12	6~13.8	-10~70	10000	0.323	3.9	28.0	0.79	0.59	15.1	47.5
	A150151M	BO4I30	+/-FG/PWM	Ball	12	6~13.8	-10~70	9000	0.238	2.9	25.1	0.71	0.50	12.6	45.2
	A150151M	BO4I40	+/-FG/PWM	Ball	12	6~13.8	-10~70	8200	0.160	1.9	22.6	0.64	0.42	10.6	41.9
	A150151M	BO4I50	+/-FG/PWM	Ball	12	6~13.8	-10~70	6500	0.116	1.4	18.2	0.52	0.27	7.0	34.7
	A150151M	BO4I60	+/-FG/PWM	Ball	12	6~13.8	-10~70	5500	0.102	1.2	15.0	0.42	0.20	5.1	30.3
5015 12V iSALT Series	A150151M	BO4F10	+/-FG/PWM	Ball	12	6~13.8	-10~70	11000	0.417	5.0	30.0	0.85	0.71	18.1	49.6
	A150151M	BO4F20	+/-FG/PWM	Ball	12	6~13.8	-10~70	10000	0.323	3.9	28.0	0.79	0.59	15.1	47.5
	A150151M	BO4F30	+/-FG/PWM	Ball	12	6~13.8	-10~70	9000	0.238	2.9	25.1	0.71	0.50	12.6	45.2
	A150151M	BO4F40	+/-FG/PWM	Ball	12	6~13.8	-10~70	8200	0.160	1.9	22.6	0.64	0.42	10.6	41.9
	A150151M	BO4F50	+/-FG/PWM	Ball	12	6~13.8	-10~70	6500	0.116	1.4	18.2	0.52	0.27	7.0	34.7
	A150151M	BO4F60	+/-FG/PWM	Ball	12	6~13.8	-10~70	5500	0.102	1.2	15.0	0.42	0.20	5.1	30.3
5015 24V IP68 系列	A150152M	BO4I10	+/-FG/PWM	Ball	24	14~27.6	-10~70	11000	0.208	5.0	30.0	0.85	0.71	18.1	49.6
	A150152M	BO4I20	+/-FG/PWM	Ball	24	14~27.6	-10~70	10000	0.161	3.9	28.0	0.79	0.59	15.1	47.5
	A150152M	BO4I30	+/-FG/PWM	Ball	24	14~27.6	-10~70	9000	0.119	2.9	25.1	0.71	0.50	12.6	45.2
	A150152M	BO4I40	+/-FG/PWM	Ball	24	14~27.6	-10~70	8200	0.080	1.9	22.6	0.64	0.42	10.6	41.9
	A150152M	BO4I50	+/-FG/PWM	Ball	24	14~27.6	-10~70	6500	0.058	1.4	18.2	0.52	0.27	7.0	34.7
	A150152M	BO4I60	+/-FG/PWM	Ball	24	14~27.6	-10~70	5500	0.051	1.2	15.0	0.42	0.20	5.1	30.3
5015 24V iSALT Series	A150152M	BO4F10	+/-FG/PWM	Ball	24	14~27.6	-10~70	11000	0.208	5.0	30.0	0.85	0.71	18.1	49.6
	A150152M	BO4F20	+/-FG/PWM	Ball	24	14~27.6	-10~70	10000	0.161	3.9	28.0	0.79	0.59	15.1	47.5
	A150152M	BO4F30	+/-FG/PWM	Ball	24	14~27.6	-10~70	9000	0.119	2.9	25.1	0.71	0.50	12.6	45.2
	A150152M	BO4F40	+/-FG/PWM	Ball	24	14~27.6	-10~70	8200	0.080	1.9	22.6	0.64	0.42	10.6	41.9
	A150152M	BO4F50	+/-FG/PWM	Ball	24	14~27.6	-10~70	6500	0.058	1.4	18.2	0.52	0.27	7.0	34.7
	A150152M	BO4F60	+/-FG/PWM	Ball	24	14~27.6	-10~70	5500	0.051	1.2	15.0	0.42	0.20	5.1	30.3