



12V / 24V

iCLOUD Fan Series
RoHS compliant



- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Ball bearings
- Control Options: +/-/FG/PWM
- Weight: 260 g
- Lead Wires : UL10368 AWG22 OR Equivalent

■ Dimensions drawing (mm)

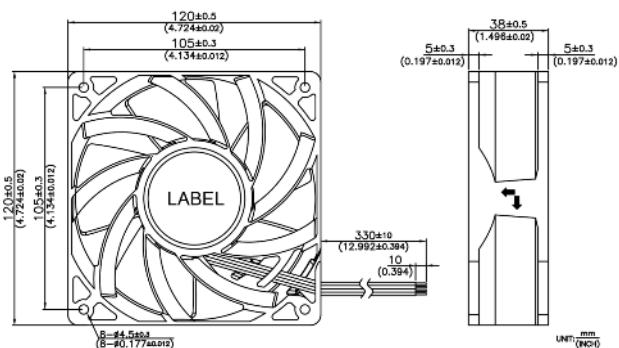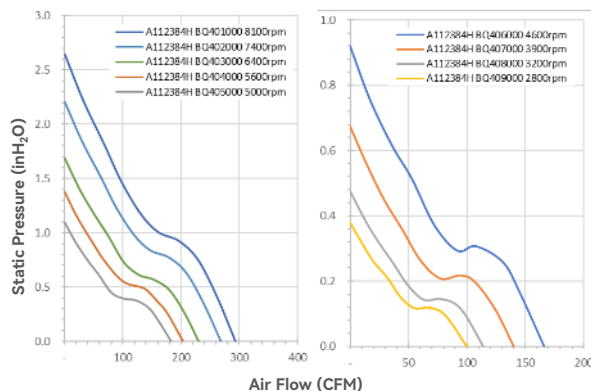


Model No.		Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise @1M
		VDC	VDC	°C	RPM	Amp	Watt	CFM	m³/min	inH₂O	mmH₂O	dB(A)
A112381H	BQ402000	12	6~13.2	-10~70	7400	5.91	70.9	268.2	7.6	2.21	56.1	70.2
A112381H	BQ403000	12	6~13.2	-10~70	6400	3.50	41.9	233.2	6.6	1.68	42.7	67.0
A112381H	BQ404000	12	6~13.2	-10~70	5600	2.05	24.6	204.0	5.8	1.38	35.0	63.4
A112381H	BQ405000	12	6~13.2	-10~70	5000	1.51	18.1	183.1	5.2	1.10	27.9	60.8
A112381H	BQ406000	12	6~13.2	-10~70	4600	1.12	13.5	166.4	4.7	0.92	23.4	58.4
A112381H	BQ407000	12	6~13.2	-10~70	3900	0.69	8.3	140.2	4.0	0.67	17.1	53.6
A112381H	BQ408000	12	6~13.2	-10~70	3200	0.43	5.1	114.0	3.2	0.47	12.1	48.4
A112381H	BQ409000	12	6~13.2	-10~70	2800	0.32	3.9	99.5	2.8	0.38	9.7	46.9
A112382H	BQ402000	24	21.6~26.4	-10~70	7400	2.95	70.9	268.2	7.6	2.21	56.1	70.2
A112382H	BQ403000	24	21.6~26.4	-10~70	6400	1.75	41.9	233.2	6.6	1.68	42.7	67.0
A112382H	BQ404000	24	21.6~26.4	-10~70	5600	1.03	24.6	204.0	5.8	1.38	35.0	63.4
A112382H	BQ405000	24	21.6~26.4	-10~70	5000	0.75	18.1	183.1	5.2	1.10	27.9	60.8
A112382H	BQ406000	24	21.6~26.4	-10~70	4600	0.56	13.5	166.4	4.7	0.92	23.4	58.4
A112382H	BQ407000	24	21.6~26.4	-10~70	3900	0.34	8.3	140.2	4.0	0.67	17.1	53.6
A112382H	BQ408000	24	21.6~26.4	-10~70	3200	0.21	5.1	114.0	3.2	0.47	12.1	48.4
A112382H	BQ409000	24	21.6~26.4	-10~70	2800	0.16	3.9	99.5	2.8	0.38	9.7	46.9

Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.
<https://www.i-hzlw.com>




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Ball bearings
- Control Options: +/-/FG/PWM
- Weight: 260 g
- Lead Wires : UL10368 AWG22 OR Equivalent

■ Air Flow-Static Pressure Characteristics

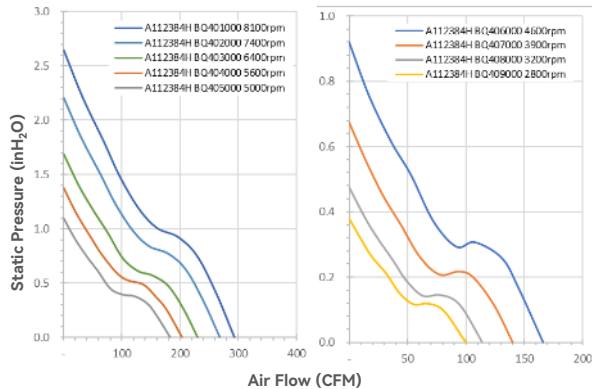

■ Dimensions drawing (mm)

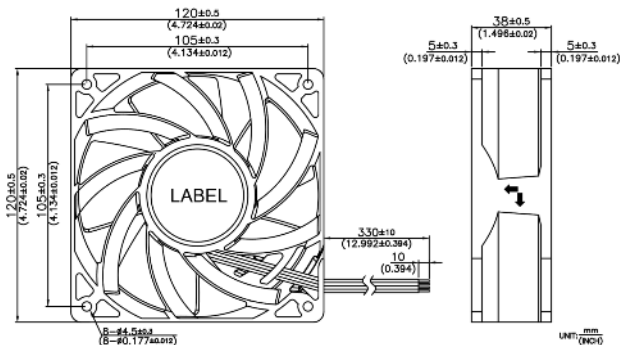

Model No.		Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise @1M
		VDC	VDC	°C	RPM	Amp	Watt	CFM	m ³ /min	inH ₂ O	mmH ₂ O	dB(A)
A112384H	BQ401000	48	36~57	-10~70	8200	1.90	91.2	300.0	8.5	2.67	67.8	72.4
A112384H	BQ402000	48	36~57	-10~70	7400	1.48	70.9	268.2	7.6	2.21	56.1	70.2
A112384H	BQ403000	48	36~57	-10~70	6400	0.87	41.9	233.2	6.6	1.68	42.7	67.0
A112384H	BQ404000	48	36~57	-10~70	5600	0.51	24.6	204.0	5.8	1.38	35.0	63.4
A112384H	BQ405000	48	36~57	-10~70	5000	0.38	18.1	183.1	5.2	1.10	27.9	60.8
A112384H	BQ406000	48	36~57	-10~70	4600	0.28	13.5	166.4	4.7	0.92	23.4	58.4

Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.
<https://www.i-hzlw.com>