


36X36X28 mm




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Ball bearings
- Control Options: +/-/FG/PWM
- Lead Wires : UL10368 AWG26 OR Equivalent

■ Air Flow-Static Pressure Characteristics

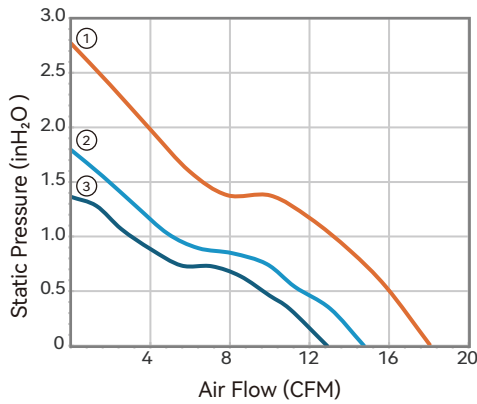

■ Dimensions Drawing (mm)

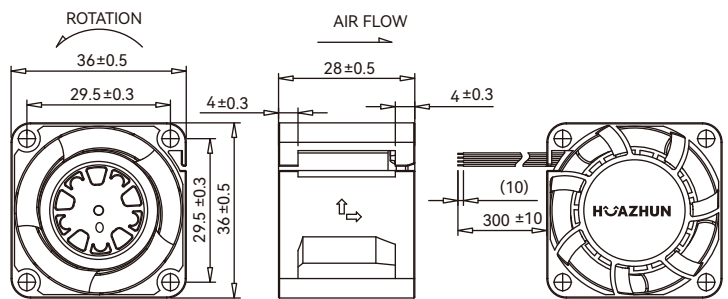

Model No.	Rated Voltage VDC	Operating Voltage Range VDC	Operating Temp. °C	Speed RPM	Input Current Amp	Input Power Watts	Maximum Air Flow		Maximum Air Pressure		Noise @1M dB(A)
							CFM	m ³ /min	inH ₂ O	mmH ₂ O	
① A136281MBM 4060L0	12	10.8~13.2	-10~70	22500	0.56	6.73	18.04	0.51	2.77	70.37	57.7
② A136281MBM 4080L0	12	10.8~13.2	-10~70	18000	0.32	3.79	14.73	0.42	1.80	45.61	54.7
③ A136281MBM 4090L0	12	10.8~13.2	-10~70	16500	0.29	3.47	12.88	0.37	1.36	34.65	51.0

Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.
<https://www.i-hzlw.com>