

DC Brushless Fan

40X40X56 mm


Dual Fan

iCLOUD Fan Series
RoHS compliant




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Ball bearings
- Control Options: +/-/FG/PWM
- Weight: 90 g
- Lead Wires : UL10368 AWG26 OR Equivalent

■ Air Flow-Static Pressure Characteristics

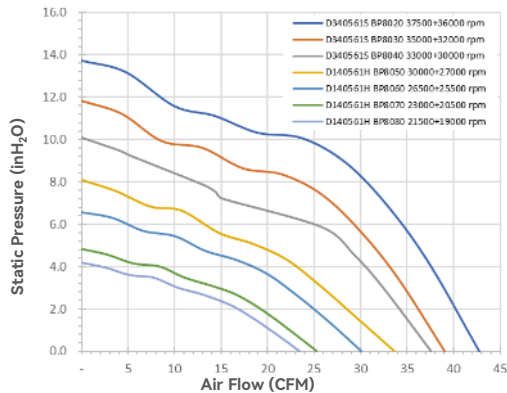

■ Dimensions drawing (mm)

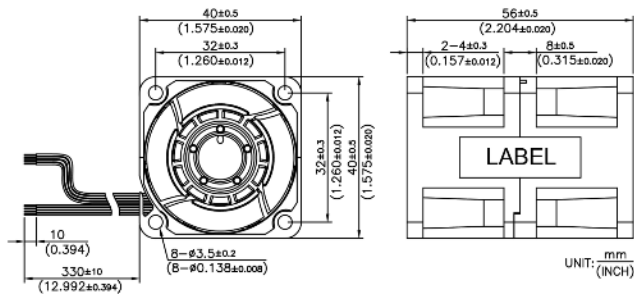

Model No.		Rated Voltage	Operating Voltage Range	Operating Temp.	Speed		Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise @1M
		VDC	VDC	°C	RPM		Amp	Watt	CFM	m ³ /min	inH ₂ O	mmH ₂ O	dB(A)
D340561S	BP8020	12	10.8~13.2	-10~70	37500	36000	5.08	61.0	42.7	1.21	13.7	349	80.9
D340561S	BP8030	12	10.8~13.2	-10~70	35000	32000	3.90	46.8	39.1	1.11	11.8	300	75.3
D340561S	BP8040	12	10.8~13.2	-10~70	33000	30000	3.23	38.8	37.6	1.06	10.1	257	74.8
D140561H	BP8050	12	10.8~13.2	-10~70	30000	27000	2.70	32.4	33.6	0.95	8.08	205	73.6
D140561H	BP8060	12	10.8~13.2	-10~70	26500	25500	2.19	26.3	30.1	0.85	6.56	167	72.1
D140561H	BP8070	12	10.8~13.2	-10~70	23000	20500	1.41	16.9	25.3	0.71	4.85	123	67.8
D140561H	BP8080	12	10.8~13.2	-10~70	21500	19000	1.17	14.1	23.4	0.66	4.19	106	65.7

Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.
<https://www.i-hzlw.com>