


120X120X25 mm

iCOOL Fan Series
RoHS compliant




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Ball bearings
- Control Options: +/-/FG/PWM
- Weight: 195 g

■ Air Flow-Static Pressure Characteristics

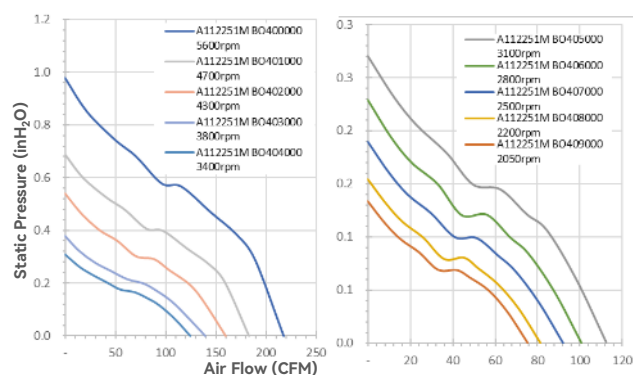

■ Dimensions drawing (mm)

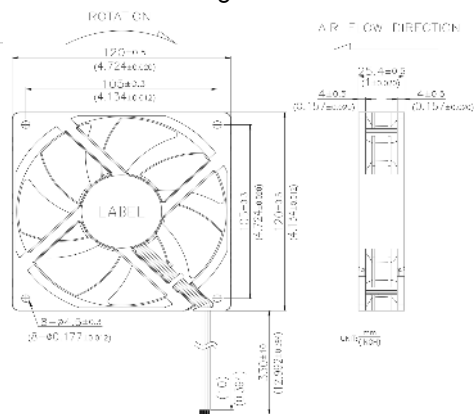

Model No.		Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise @1M
		VDC	VDC	°C	RPM	Amp	Watt	CFM	m³/min	inH₂O	mmH₂O	dB(A)
A112251M	BO400000	12	7~13.8	10~70	5600	2.208	26.5	217.7	6.16	0.98	24.8	60.6
A112251M	BO401000	12	7~13.8	10~70	4700	1.305	15.7	182.7	5.17	0.69	17.5	57.2
A112251M	BO402000	12	7~13.8	10~70	4300	1.040	12.5	159.7	4.52	0.54	13.7	54.2
A112251M	BO403000	12	7~13.8	10~70	3800	0.667	8.0	139.2	3.94	0.38	9.6	51.0
A112251M	BO404000	12	7~13.8	10~70	3400	0.480	5.8	124.2	3.51	0.31	7.8	48.7
A112251M	BO405000	12	7~13.8	10~70	3100	0.378	4.5	112.4	3.18	0.27	6.9	46.1
A112251M	BO406000	12	7~13.8	10~70	2800	0.273	3.3	100.8	2.85	0.23	5.8	42.5
A112251M	BO407000	12	7~13.8	10~70	2500	0.230	2.8	92.0	2.60	0.19	4.8	39.3
A112251M	BO408000	12	7~13.8	10~70	2200	0.169	2.0	81.2	2.30	0.15	3.9	35.7
A112251M	BO409000	12	7~13.8	10~70	2050	0.143	1.7	75.4	2.13	0.13	3.4	33.7
A112252M	BO400000	24	14~27.6	10~70	5600	1.104	26.5	217.7	6.16	0.98	24.8	60.6
A112252M	BO401000	24	14~27.6	10~70	4700	0.653	15.7	182.7	5.17	0.69	17.5	57.2
A112252M	BO402000	24	14~27.6	10~70	4300	0.520	12.5	159.7	4.52	0.54	13.7	54.2
A112252M	BO403000	24	14~27.6	10~70	3800	0.333	8.0	139.2	3.94	0.38	9.6	51.0
A112252M	BO404000	24	14~27.6	10~70	3400	0.240	5.8	124.2	3.51	0.31	7.8	48.7
A112252M	BO405000	24	14~27.6	10~70	3100	0.189	4.5	112.4	3.18	0.27	6.9	46.1
A112252M	BO406000	24	14~27.6	10~70	2800	0.136	3.3	100.8	2.85	0.23	5.8	42.5

Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.
<https://www.i-hzlw.com>