


# 30X30X10 mm




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Hydraulic bearings
- Control Options: +/-/FG/PWM
- Weight: 8 g

### ■ Air Flow-Static Pressure Characteristics

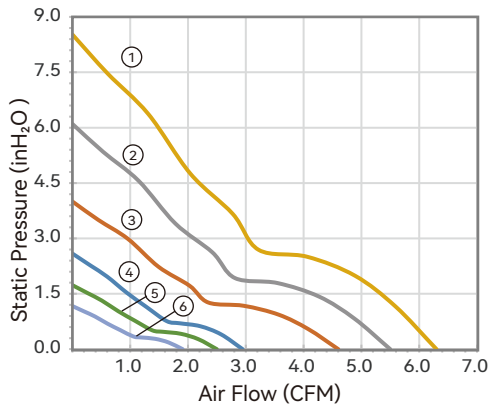

### ■ Dimensions Drawing (mm)

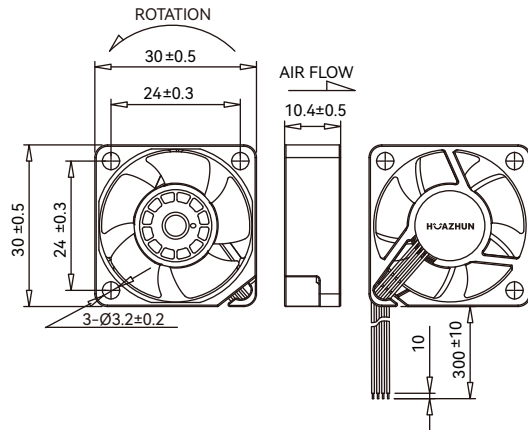

Model No.	Rated Voltage VDC	Operating Voltage Range VDC	Operating Temp. °C	Speed RPM	Input Current Amp	Input Power Watts	Maximum Air Flow		Maximum Air Pressure		Noise @1M dB(A)
							CFM	m <sup>3</sup> /min	inH <sub>2</sub> O	mmH <sub>2</sub> O	
① A130100M H40N00N0	5	3.5~5.5	-10~70	13000	0.240	1.20	6.30	0.18	0.34	8.52	29.0
② A130100M H40N10N0	5	3.5~5.5	-10~70	11000	0.144	0.72	5.50	0.16	0.24	6.10	23.0
③ A130100M H40N20N0	5	3.5~5.5	-10~70	8600	0.120	0.60	4.65	0.13	0.16	4.00	20.0
④ A130100M H40N30N0	5	3.5~5.5	-10~70	6900	0.091	0.46	2.95	0.08	0.10	2.59	18.2
⑤ A130100M H40N40N0	5	3.5~5.5	-10~70	5700	0.077	0.38	2.50	0.07	0.07	1.73	16.8
⑥ A130100M H40N50N0	5	3.5~5.5	-10~70	4500	0.065	0.32	1.91	0.05	0.05	1.17	10.5
① A130101M HO4000	12	7~13.8	-10~70	13000	0.100	1.20	6.30	0.18	0.34	8.52	29.0
② A130101M HO4010	12	7~13.8	-10~70	11000	0.060	0.72	5.50	0.16	0.24	6.10	23.0
③ A130101M HO4020	12	7~13.8	-10~70	8600	0.050	0.60	4.65	0.13	0.16	4.00	20.0
④ A130101M HO4030	12	7~13.8	-10~70	6900	0.038	0.46	2.95	0.08	0.10	2.59	18.2
⑤ A130101M HO4040	12	7~13.8	-10~70	5700	0.032	0.38	2.50	0.07	0.07	1.73	16.8
⑥ A130101M HO4050	12	7~13.8	-10~70	4500	0.027	0.32	1.91	0.05	0.05	1.17	10.5

Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.  
<https://www.i-hzlw.com>