


# 50X50X15 mm




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Ball bearings
- Control Options: +/-/FG/PWM
- Weight: 34.1 g

### ■ Air Flow-Static Pressure Characteristics

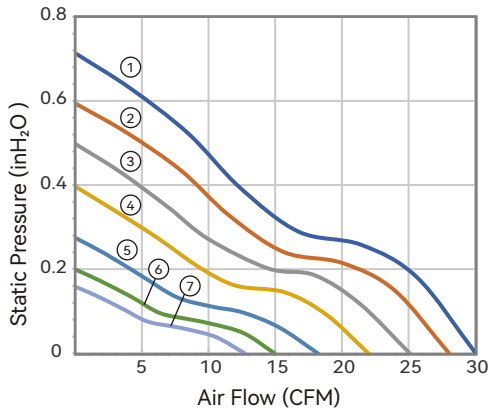

### ■ Dimensions Drawing (mm)

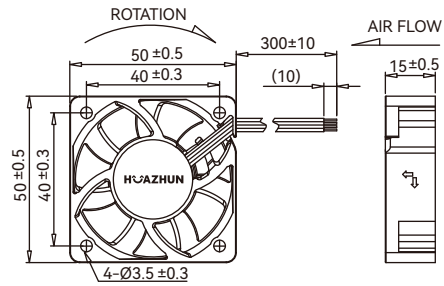

Model No.	Rated Voltage VDC	Operating Voltage Range VDC	Operating Temp. °C	Speed RPM	Input Current Amp	Input Power Watts	Maximum Air Flow		Maximum Air Pressure		Noise @1M dB(A)
							CFM	m <sup>3</sup> /min	inH <sub>2</sub> O	mmH <sub>2</sub> O	
① A150151M BO4010	12	6~13.8	-10~70	11000	0.380	4.56	30.0	0.85	0.71	18.1	49.6
② A150151M BO4020	12	6~13.8	-10~70	10000	0.285	3.43	28.0	0.79	0.59	15.1	47.5
③ A150151M BO4030	12	6~13.8	-10~70	9000	0.208	2.50	25.1	0.71	0.50	12.6	45.2
④ A150151M BO4040	12	6~13.8	-10~70	8000	0.140	1.68	22.0	0.62	0.40	10.1	40.6
⑤ A150151M BO4050	12	6~13.8	-10~70	6500	0.101	1.21	18.2	0.52	0.27	7.0	34.7
⑥ A150151M BO4060	12	6~13.8	-10~70	5500	0.067	0.81	15.0	0.42	0.20	5.1	30.3
⑦ A150151M BO4070	12	6~13.8	-10~70	4700	0.048	0.58	12.7	0.36	0.16	4.0	26.9
① A150152M B40N10N0	24	14~27.6	-10~70	11000	0.190	4.56	30.0	0.85	0.71	18.1	49.6
② A150152M B40N20N0	24	14~27.6	-10~70	10000	0.143	3.43	28.0	0.79	0.59	15.1	47.5
③ A150152M B40N30N0	24	14~27.6	-10~70	9000	0.104	2.50	25.1	0.71	0.50	12.6	45.2
④ A150152M B40N40N0	24	14~27.6	-10~70	8000	0.070	1.68	22.0	0.62	0.40	10.1	40.6
⑤ A150152M B40N50N0	24	14~27.6	-10~70	6500	0.050	1.21	18.2	0.52	0.27	7.0	34.7
⑥ A150152M B40N60N0	24	14~27.6	-10~70	5500	0.034	0.81	15.0	0.42	0.20	5.1	30.3
⑦ A150152M B40N70N0	24	14~27.6	-10~70	4700	0.024	0.58	12.7	0.36	0.16	4.0	26.9


Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.  
<https://www.i-hzlw.com>

# 50X50X15 mm




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Hydraulic bearings
- Control Options: +/-/FG/PWM
- Weight: 32.8 g

### ■ Air Flow-Static Pressure Characteristics

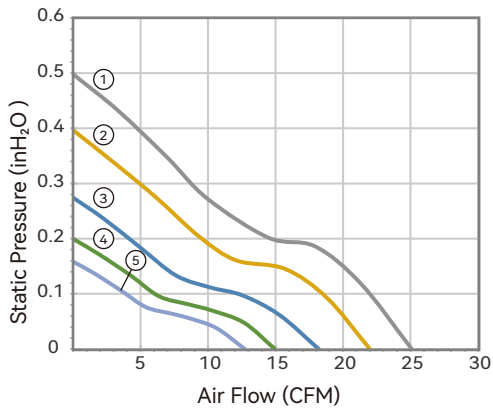

### ■ Dimensions Drawing (mm)

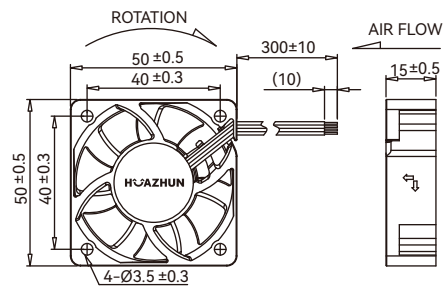

Model No.	Rated Voltage VDC	Operating Voltage Range VDC	Operating Temp. °C	Speed RPM	Input Current Amp	Input Power Watts	Maximum Air Flow		Maximum Air Pressure		Noise @1M dB(A)
							CFM	m <sup>3</sup> /min	inH <sub>2</sub> O	mmH <sub>2</sub> O	
① A150151M HO4030	12	6~13.8	-10~70	9000	0.486	5.83	25.10	0.71	0.50	12.6	43.2
② A150151M HO4040	12	6~13.8	-10~70	8000	0.290	3.48	22.00	0.62	0.40	10.1	38.6
③ A150151M HO4050	12	6~13.8	-10~70	6500	0.200	2.40	18.20	0.52	0.27	7.0	32.7
④ A150151M HO4060	12	6~13.8	-10~70	5500	0.120	1.44	15.00	0.42	0.20	5.1	28.3
⑤ A150151M HO4070	12	6~13.8	-10~70	4700	0.070	0.84	12.70	0.36	0.16	4.0	24.9
① A150152M H40N30N0	24	14~27.6	-10~70	9000	0.243	5.83	25.10	0.71	0.50	12.6	43.2
② A150152M H40N40N0	24	14~27.6	-10~70	8000	0.145	3.48	22.00	0.62	0.40	10.1	38.6
③ A150152M H40N50N0	24	14~27.6	-10~70	6500	0.100	2.40	18.20	0.52	0.27	7.0	32.7
④ A150152M H40N60N0	24	14~27.6	-10~70	5500	0.060	1.44	15.00	0.42	0.20	5.1	28.3
⑤ A150152M H40N70N0	24	14~27.6	-10~70	4700	0.035	0.84	12.70	0.36	0.16	4.0	24.9

Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.  
<https://www.i-hzlw.com>