


70X70X25 mm




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Ball bearings
- Control Options: +/-/FG/PWM
- Weight: 75 g

■ Air Flow-Static Pressure Characteristics

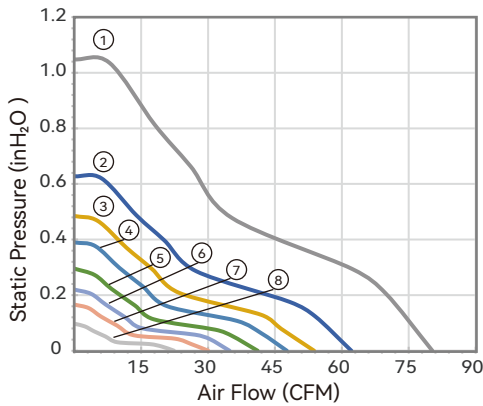

■ Dimensions Drawing (mm)

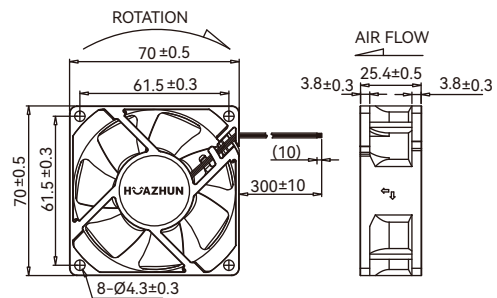

Model No.	Rated Voltage VDC	Operating Voltage Range VDC	Operating Temp. °C	Speed RPM	Input Current Amp	Input Power Watts	Maximum Air Flow		Maximum Air Pressure		Noise @1M dB(A)
							CFM	m ³ /min	inH ₂ O	mmH ₂ O	
① A170251M B40N10N0	12	7~13.8	-10~70	8400	1.223	14.70	80.30	2.27	1.05	26.63	54.4
② A170251M B40N20N0	12	7~13.8	-10~70	6500	0.567	6.80	62.10	1.76	0.63	15.94	48.8
③ A170251M B40N40N0	12	7~13.8	-10~70	5600	0.342	4.10	53.80	1.52	0.48	12.31	44.7
④ A170251M B40N50N0	12	7~13.8	-10~70	5000	0.267	3.20	47.70	1.35	0.39	9.89	41.2
⑤ A170251M B40N60N0	12	7~13.8	-10~70	4300	0.183	2.20	41.10	1.16	0.30	7.50	36.1
⑥ A170251M B40N70N0	12	7~13.8	-10~70	3700	0.120	1.43	34.80	0.99	0.22	5.58	32.8
⑦ A170251M B40N80N0	12	7~13.8	-10~70	3200	0.092	1.10	30.00	0.85	0.17	4.22	29.6
⑧ A170251M B40N90N0	12	7~13.8	-10~70	2400	0.043	0.51	22.40	0.63	0.10	2.46	21.2
① A170252M B40N10N0	24	14~27.6	-10~70	8400	0.611	14.70	80.30	2.27	1.05	26.63	54.4
② A170252M B40N20N0	24	14~27.6	-10~70	6500	0.283	6.80	62.10	1.76	0.63	15.94	48.8
③ A170252M B40N40N0	24	14~27.6	-10~70	5600	0.171	4.10	53.80	1.52	0.48	12.31	44.7
④ A170252M B40N50N0	24	14~27.6	-10~70	5000	0.133	3.20	47.70	1.35	0.39	9.89	41.2
⑤ A170252M B40N60N0	24	14~27.6	-10~70	4300	0.092	2.20	41.10	1.16	0.30	7.50	36.1
⑥ A170252M B40N70N0	24	14~27.6	-10~70	3700	0.060	1.43	34.80	0.99	0.22	5.58	32.8
⑦ A170252M B40N80N0	24	14~27.6	-10~70	3200	0.046	1.10	30.00	0.85	0.17	4.22	29.6
⑧ A170252M B40N90N0	24	14~27.6	-10~70	2400	0.021	0.51	22.40	0.63	0.10	2.46	21.2


Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.
<https://www.i-hzlw.com>

70X70X25 mm




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Hydraulic bearings
- Control Options: +/-/FG/PWM
- Weight: 75 g

■ Air Flow-Static Pressure Characteristics

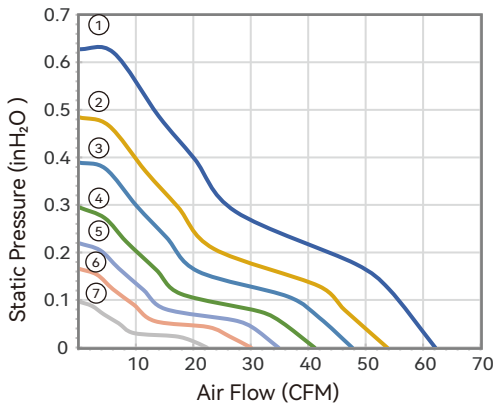

■ Dimensions Drawing (mm)

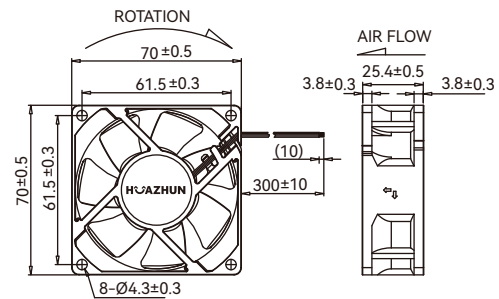

Model No.	Rated Voltage VDC	Operating Voltage Range VDC	Operating Temp. °C	Speed RPM	Input Current Amp	Input Power Watts	Maximum Air Flow		Maximum Air Pressure		Noise @1M dB(A)
							CFM	m ³ /min	inH ₂ O	mmH ₂ O	
① A170251M H40N20N0	12	7~13.8	-10~70	6500	0.567	6.80	62.10	1.76	0.63	15.94	48.8
② A170251M H40N40N0	12	7~13.8	-10~70	5600	0.342	4.10	53.80	1.52	0.48	12.31	44.7
③ A170251M H40N50N0	12	7~13.8	-10~70	5000	0.267	3.20	47.70	1.35	0.39	9.89	41.2
④ A170251M H40N60N0	12	7~13.8	-10~70	4300	0.183	2.20	41.10	1.16	0.30	7.50	36.1
⑤ A170251M H40N70N0	12	7~13.8	-10~70	3700	0.120	1.43	34.80	0.99	0.22	5.58	32.8
⑥ A170251M H40N80N0	12	7~13.8	-10~70	3200	0.092	1.10	30.00	0.85	0.17	4.22	29.6
⑦ A170251M H40N90N0	12	7~13.8	-10~70	2400	0.043	0.51	22.40	0.63	0.10	2.46	21.2
① A170252M H40N20N0	24	14~27.6	-10~70	6500	0.283	6.80	62.10	1.76	0.63	15.94	48.8
② A170252M H40N40N0	24	14~27.6	-10~70	5600	0.171	4.10	53.80	1.52	0.48	12.31	44.7
③ A170252M H40N50N0	24	14~27.6	-10~70	5000	0.133	3.20	47.70	1.35	0.39	9.89	41.2
④ A170252M H40N60N0	24	14~27.6	-10~70	4300	0.092	2.20	41.10	1.16	0.30	7.50	36.1
⑤ A170252M H40N70N0	24	14~27.6	-10~70	3700	0.060	1.43	34.80	0.99	0.22	5.58	32.8
⑥ A170252M H40N80N0	24	14~27.6	-10~70	3200	0.046	1.10	30.00	0.85	0.17	4.22	29.6
⑦ A170252M H40N90N0	24	14~27.6	-10~70	2400	0.021	0.51	22.40	0.63	0.10	2.46	21.2

Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.
<https://www.i-hzlw.com>