

DC Brushless Fan


70X70X25 mm

iCOOL Fan Series
RoHS compliant




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Ball bearings
- Control Options: +/-/FG/PWM
- Weight: 75 g

■ Air Flow-Static Pressure Characteristics

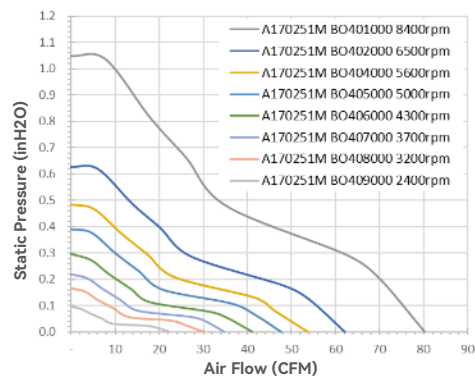

■ Dimensions drawing (mm)

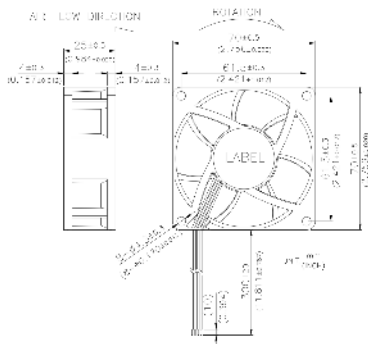

Model No.		Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise @1M
		VDC	VDC	°C	RPM	Amp	Watt	CFM	m ³ /min	inH ₂ O	mmH ₂ O	dB(A)
A170251M	BO401000	12	7~13.8	-10~70	8400	1.223	14.7	80.3	2.27	1.05	26.63	54.4
A170251M	BO402000	12	7~13.8	-10~70	6500	0.567	6.8	62.1	1.76	0.63	15.94	48.8
A170251M	BO404000	12	7~13.8	-10~70	5600	0.342	4.1	53.8	1.52	0.48	12.31	44.7
A170251M	BO405000	12	7~13.8	-10~70	5000	0.267	3.2	47.7	1.35	0.39	9.89	41.2
A170251M	BO406000	12	7~13.8	-10~70	4300	0.183	2.2	41.1	1.16	0.30	7.50	36.1
A170251M	BO407000	12	7~13.8	-10~70	3700	0.120	1.43	34.8	0.99	0.22	5.58	32.8
A170251M	BO408000	12	7~13.8	-10~70	3200	0.092	1.10	30.0	0.85	0.17	4.22	29.6
A170251M	BO409000	12	7~13.8	-10~70	2400	0.043	0.51	22.4	0.63	0.10	2.46	21.2
A170252M	BO401000	24	14~27.6	-10~70	8400	0.611	14.7	80.3	2.27	1.05	26.63	54.4
A170252M	BO402000	24	14~27.6	-10~70	6500	0.283	6.8	62.1	1.76	0.63	15.94	48.8
A170252M	BO404000	24	14~27.6	-10~70	5600	0.171	4.1	53.8	1.52	0.48	12.31	44.7
A170252M	BO405000	24	14~27.6	-10~70	5000	0.133	3.2	47.7	1.35	0.39	9.89	41.2
A170252M	BO406000	24	14~27.6	-10~70	4300	0.092	2.2	41.1	1.16	0.30	7.50	36.1
A170252M	BO407000	24	14~27.6	-10~70	3700	0.060	1.43	34.8	0.99	0.22	5.58	32.8
A170252M	BO408000	24	14~27.6	-10~70	3200	0.046	1.10	30.0	0.85	0.17	4.22	29.6
A170252M	BO409000	24	14~27.6	-10~70	2400	0.021	0.51	22.4	0.63	0.10	2.46	21.2

Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.
<https://www.i-hzlw.com>

DC Brushless Fan


70X70X25 mm

iCOOL Fan Series
RoHS compliant




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Hydraulic bearings
- Control Options: +/-/FG/PWM
- Weight: 75 g

■ Air Flow-Static Pressure Characteristics

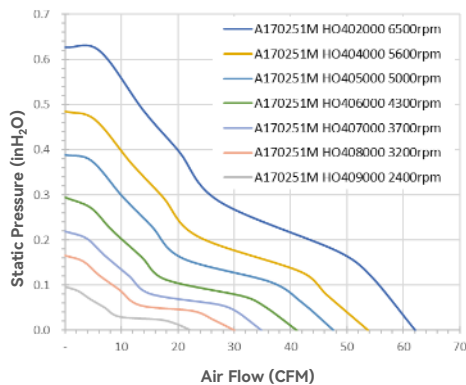

■ Dimensions drawing (mm)

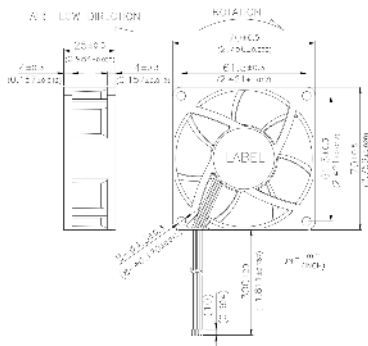

Model No.		Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise @1M
		VDC	VDC	°C	RPM	Amp	Watt	CFM	m ³ /min	inH ₂ O	mmH ₂ O	dB(A)
A170251M	HO402000	12	7~13.8	-10~70	6500	0.567	6.8	62.1	1.76	0.63	15.94	48.8
A170251M	HO404000	12	7~13.8	-10~70	5600	0.342	4.1	53.8	1.52	0.48	12.31	44.7
A170251M	HO405000	12	7~13.8	-10~70	5000	0.267	3.2	47.7	1.35	0.39	9.89	41.2
A170251M	HO406000	12	7~13.8	-10~70	4300	0.183	2.2	41.1	1.16	0.30	7.50	36.1
A170251M	HO407000	12	7~13.8	-10~70	3700	0.120	1.43	34.8	0.99	0.22	5.58	32.8
A170251M	HO408000	12	7~13.8	-10~70	3200	0.092	1.10	30.0	0.85	0.17	4.22	29.6
A170251M	HO409000	12	7~13.8	-10~70	2400	0.043	0.51	22.4	0.63	0.10	2.46	21.2
A170252M	HO402000	24	14~27.6	-10~70	6500	0.283	6.8	62.1	1.76	0.63	15.94	48.8
A170252M	HO404000	24	14~27.6	-10~70	5600	0.171	4.1	53.8	1.52	0.48	12.31	44.7
A170252M	HO405000	24	14~27.6	-10~70	5000	0.133	3.2	47.7	1.35	0.39	9.89	41.2
A170252M	HO406000	24	14~27.6	-10~70	4300	0.092	2.2	41.1	1.16	0.30	7.50	36.1
A170252M	HO407000	24	14~27.6	-10~70	3700	0.060	1.43	34.8	0.99	0.22	5.58	32.8
A170252M	HO408000	24	14~27.6	-10~70	3200	0.046	1.10	30.0	0.85	0.17	4.22	29.6
A170252M	HO409000	24	14~27.6	-10~70	2400	0.021	0.51	22.4	0.63	0.10	2.46	21.2

Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.
<https://www.i-hzlw.com>