


80X80X15 mm




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Ball bearings
- Control Options: +/-/FG/PWM

■ Air Flow-Static Pressure Characteristics

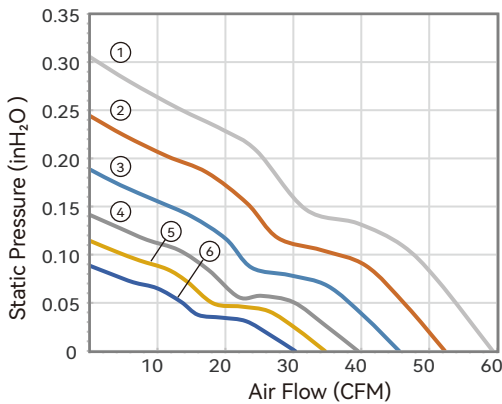

■ Dimensions Drawing (mm)

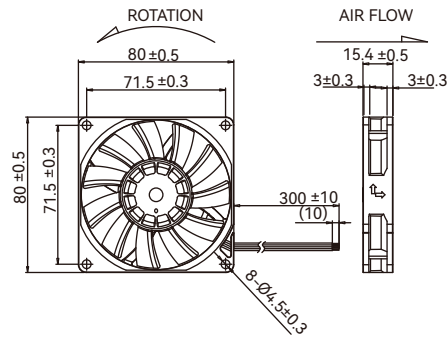

Model No.	Rated Voltage VDC	Operating Voltage Range VDC	Operating Temp. °C	Speed RPM	Input Current Amp	Input Power Watts	Maximum Air Flow		Maximum Air Pressure		Noise @1M dB(A)
							CFM	m ³ /min	inH ₂ O	mmH ₂ O	
① A180151MB 40N20N0	12	6~13.8	-10~70	4500	0.363	4.36	59.36	1.68	0.31	7.76	47.6
② A180151MB 40N30N0	12	6~13.8	-10~70	4000	0.249	2.99	52.29	1.48	0.24	6.21	43.9
③ A180151MB 40N40N0	12	6~13.8	-10~70	3500	0.166	1.99	45.58	1.29	0.19	4.79	38.8
④ A180151MB 40N50N0	12	6~13.8	-10~70	3000	0.105	1.26	39.50	1.12	0.14	3.59	34.6
⑤ A180151MB 40N60N0	12	6~13.8	-10~70	2700	0.079	0.95	34.65	0.98	0.11	2.91	33.0
⑥ A180151MB 40N70N0	12	6~13.8	-10~70	2400	0.056	0.67	30.26	0.86	0.09	2.25	29.1
① A180152MB 40N20N0	24	14~27.6	-10~70	4500	0.182	4.36	59.36	1.68	0.31	7.76	47.6
② A180152MB 40N30N0	24	14~27.6	-10~70	4000	0.124	2.99	52.29	1.48	0.24	6.21	43.9
③ A180152MB 40N40N0	24	14~27.6	-10~70	3500	0.083	1.99	45.58	1.29	0.19	4.79	38.8
④ A180152MB 40N50N0	24	14~27.6	-10~70	3000	0.052	1.26	39.50	1.12	0.14	3.59	34.6
⑤ A180152MB 40N60N0	24	14~27.6	-10~70	2700	0.039	0.95	34.65	0.98	0.11	2.91	33.0
⑥ A180152MB 40N70N0	24	14~27.6	-10~70	2400	0.028	0.67	30.26	0.86	0.09	2.25	33.1

Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.
<https://www.i-hzlw.com>