

iCOOL FAN

Compact and quiet fan series




DC BRUSHLESS
Axial Fan and Blower
RoHS compliant

HUAZHUN




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Hydraulic bearings
- Control Options: +/-/FG/PWM
- Weight: 8.1 g

■ Air Flow-Static Pressure Characteristics

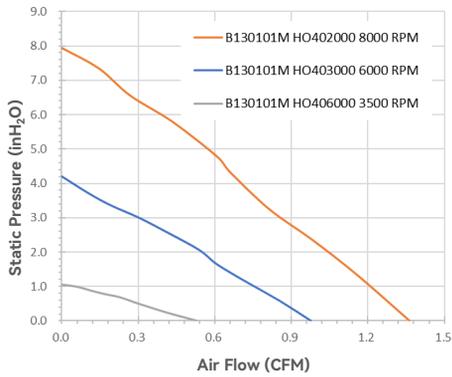

■ Dimensions drawing (mm)

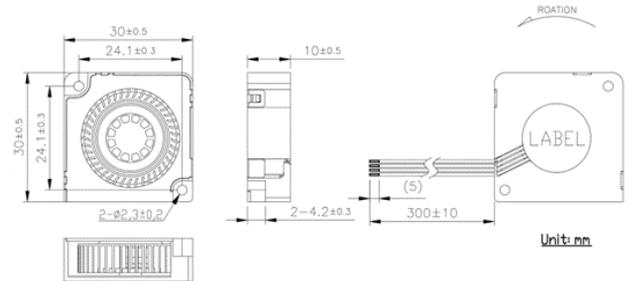


Model No.		Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise @1M
		VDC	VDC	°C				CFM	m ³ /min	inH ₂ O	mmH ₂ O	
B130100M	HO402000	5	3.5~5.5	-10~70	8000	0.160	0.80	1.36	0.039	0.313	7.95	29.8
B130100M	HO403000	5	3.5~5.5	-10~70	6000	0.086	0.43	0.98	0.028	0.165	4.20	22.5
B130100M	HO406000	5	3.5~5.5	-10~70	3500	0.032	0.16	0.53	0.015	0.046	1.06	16.1
B130101M	HO402000	12	7~13.8	-10~70	8000	0.067	0.80	1.36	0.039	0.313	7.95	29.8
B130101M	HO403000	12	7~13.8	-10~70	6000	0.036	0.43	0.98	0.028	0.165	4.20	22.5
B130101M	HO406000	12	7~13.8	-10~70	3500	0.013	0.16	0.53	0.015	0.046	1.06	16.1

Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.
<https://www.i-hzlw.com>




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Hydraulic bearings
- Control Options: +/-/FG/PWM
- Weight: 26 g

■ Air Flow-Static Pressure Characteristics

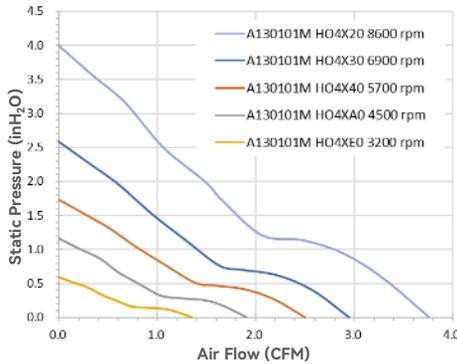


■ Dimensions drawing (mm)

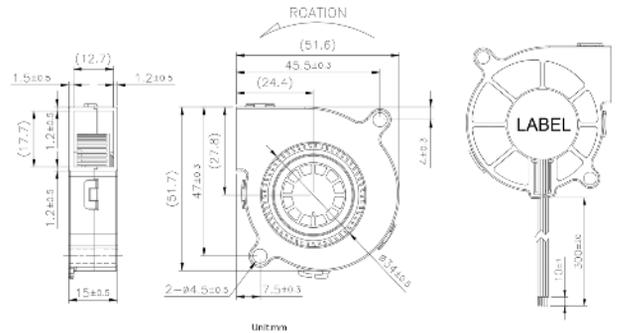


Model No.	Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise @1M	
	VDC	VDC	°C	RPM	Amp	Watt	CFM	m ³ /min	inH ₂ O	mmH ₂ O		dB(A)
B150150M	HO4020	5	4.5~6	-10~70	6500	0.686	3.43	5.1	0.14	0.88	21.6	43.8
B150150M	HO4030	5	4.5~6	-10~70	5800	0.460	2.30	4.5	0.13	0.70	17.2	39.8
B150150M	HO4040	5	4.5~6	-10~70	5200	0.400	2.00	4.0	0.11	0.51	12.5	37.4
B150150M	HO4050	5	4.5~6	-10~70	4500	0.302	1.51	3.3	0.09	0.34	8.4	34.3
B150150M	HO4060	5	4.5~6	-10~70	3800	0.218	1.09	2.7	0.08	0.22	5.4	30.6
B150150M	HO4070	5	4.5~6	-10~70	3000	0.400	0.73	2.0	0.06	0.12	2.9	25.5
B150151M	HO4020	12	6~13.8	-10~70	6500	0.286	3.43	5.1	0.14	0.88	21.6	43.8
B150151M	HO4030	12	6~13.8	-10~70	5800	0.192	2.30	4.5	0.13	0.70	17.2	39.8
B150151M	HO4040	12	6~13.8	-10~70	5200	0.167	2.00	4.0	0.11	0.51	12.5	37.4
B150151M	HO4050	12	6~13.8	-10~70	4500	0.126	1.51	3.3	0.09	0.34	8.4	34.3
B150152M	HO4020	24	14~27.6	-10~70	6500	0.143	3.43	5.1	0.14	0.88	21.6	43.8
B150152M	HO4030	24	14~27.6	-10~70	5800	0.096	2.30	4.5	0.13	0.70	17.2	39.8
B150152M	HO4040	24	14~27.6	-10~70	5200	0.083	2.00	4.0	0.11	0.51	12.5	37.4

Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.
<https://www.i-hzlw.com>




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Hydraulic bearings
- Control Options: +/-/FG/PWM
- Weight: 7.7 g

■ Air Flow-Static Pressure Characteristics

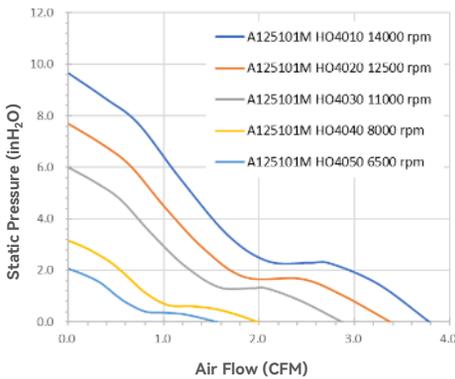

■ Dimensions drawing (mm)

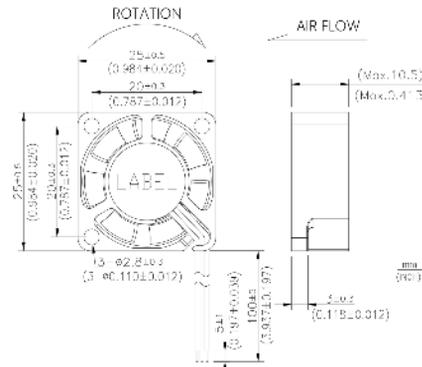


Model No.		Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise @1M
		VDC	VDC	°C				CFM	m ³ /min	inH ₂ O	mmH ₂ O	
A125100M	HO4010	5	3.5~5.5	-10~70	14000	0.178	0.89	3.78	0.11	0.38	9.66	31.4
A125100M	HO4020	5	3.5~5.5	-10~70	12500	0.126	0.63	3.27	0.09	0.30	7.74	27.5
A125100M	HO4030	5	3.5~5.5	-10~70	11000	0.111	0.55	2.87	0.08	0.24	5.99	25.4
A125100M	HO4040	5	3.5~5.5	-10~70	8000	0.062	0.31	1.98	0.06	0.12	3.16	19.4
A125100M	HO4050	5	3.5~5.5	-10~70	6500	0.049	0.24	1.56	0.04	0.08	2.07	16.7
A125101M	HO4010	12	7~13.8	-10~70	14000	0.074	0.89	3.78	0.11	0.38	9.66	31.4
A125101M	HO4020	12	7~13.8	-10~70	12500	0.053	0.63	3.27	0.09	0.30	7.74	27.5
A125101M	HO4030	12	7~13.8	-10~70	11000	0.046	0.55	2.87	0.08	0.24	5.99	25.4
A125101M	HO4040	12	7~13.8	-10~70	8000	0.026	0.31	1.98	0.06	0.12	3.16	19.4
A125101M	HO4050	12	7~13.8	-10~70	6500	0.020	0.24	1.56	0.04	0.08	2.07	16.7

Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.
<https://www.i-hzlw.com>




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Hydraulic bearings
- Control Options: +/-/FG/PWM
- Weight: 8 g

■ Air Flow-Static Pressure Characteristics

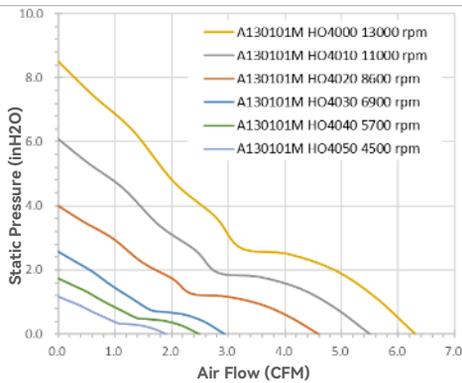

■ Dimensions drawing (mm)

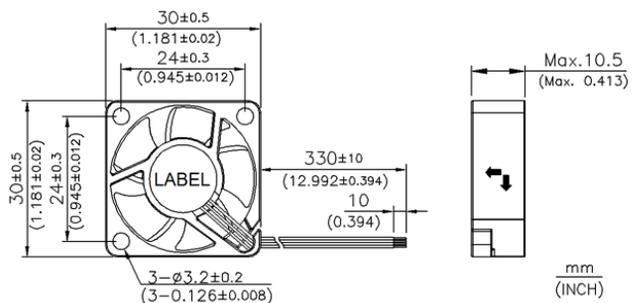


Model No.		Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise @1M
		VDC	VDC	°C				CFM	m ³ /min	inH ₂ O	mmH ₂ O	
A130100M	HO4000	5	3.5~5.5	-10~70	13000	0.240	1.20	6.30	0.18	0.34	8.52	29.0
A130100M	HO4010	5	3.5~5.5	-10~70	11000	0.144	0.72	5.50	0.16	0.24	6.10	23.0
A130100M	HO4020	5	3.5~5.5	-10~70	8600	0.120	0.60	4.65	0.13	0.16	4.00	20.0
A130100M	HO4030	5	3.5~5.5	-10~70	6900	0.091	0.46	2.95	0.08	0.10	2.59	18.2
A130100M	HO4040	5	3.5~5.5	-10~70	5700	0.077	0.38	2.50	0.07	0.07	1.73	16.8
A130100M	HO4050	5	3.5~5.5	-10~70	4500	0.065	0.32	1.91	0.05	0.05	1.17	16.3
A130101M	HO4000	12	7~13.8	-10~70	13000	0.100	1.20	6.30	0.18	0.34	8.52	29.0
A130101M	HO4010	12	7~13.8	-10~70	11000	0.060	0.72	5.50	0.16	0.24	6.10	23.0
A130101M	HO4020	12	7~13.8	-10~70	8600	0.050	0.60	4.65	0.13	0.16	4.00	20.0
A130101M	HO4030	12	7~13.8	-10~70	6900	0.038	0.46	2.95	0.08	0.10	2.59	18.2
A130101M	HO4040	12	7~13.8	-10~70	5700	0.032	0.38	2.50	0.07	0.07	1.73	16.8
A130101M	HO4050	12	7~13.8	-10~70	4500	0.027	0.32	1.91	0.05	0.05	1.17	16.3

Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.
<https://www.i-hzlw.com>




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Hydraulic bearings
- Control Options: +/-/FG/PWM
- Weight: 10 g

■ Air Flow-Static Pressure Characteristics

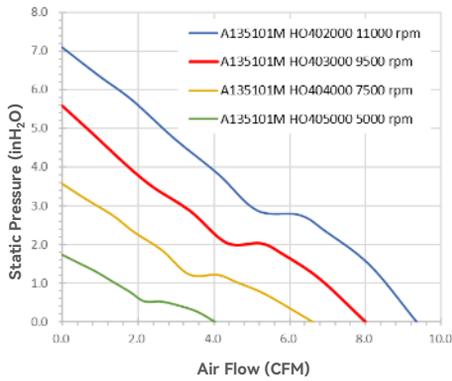

■ Dimensions drawing (mm)

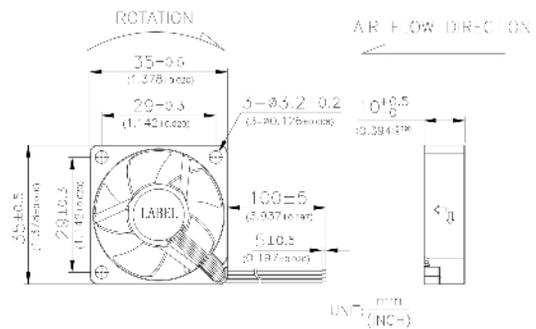


Model No.		Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise @1M
		VDC	VDC	°C	RPM	Amp	Watt	CFM	m ³ /min	inH ₂ O	mmH ₂ O	dB(A)
A135100M	HO403000	5	4~5.5	-10~70	9500	0.233	1.16	8.01	0.23	0.22	5.58	28.0
A135100M	HO404000	5	4~5.5	-10~70	7500	0.140	0.70	6.62	0.19	0.14	3.57	21.9
A135100M	HO405000	5	4~5.5	-10~70	5000	0.060	0.30	4.04	0.11	0.07	1.73	15.9
A135101M	HO402000	12	7~13.8	-10~70	11000	0.130	1.56	9.35	0.26	0.28	7.09	32.1
A135101M	HO403000	12	7~13.8	-10~70	9500	0.097	1.16	8.01	0.23	0.22	5.58	28.0
A135101M	HO404000	12	7~13.8	-10~70	7500	0.058	0.70	6.62	0.19	0.14	3.57	21.9
A135101M	HO405000	12	7~13.8	-10~70	5000	0.025	0.30	4.04	0.11	0.07	1.73	15.9
A135102M	HO402000	24	14~27.6	-10~70	11000	0.065	1.56	9.35	0.26	0.28	7.09	32.1
A135102M	HO403000	24	14~27.6	-10~70	9000	0.035	0.85	7.59	0.21	0.20	5.01	27.1
A135102M	HO404000	24	14~27.6	-10~70	7000	0.024	0.58	5.76	0.16	0.12	3.14	21.0
A135102M	HO405000	24	14~27.6	-10~70	5000	0.013	0.30	4.04	0.11	0.07	1.73	15.9

Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.
<https://www.i-hzlw.com>




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Ball bearings
- Control Options: +/-/FG/PWM
- Weight: 16 g

■ Air Flow-Static Pressure Characteristics

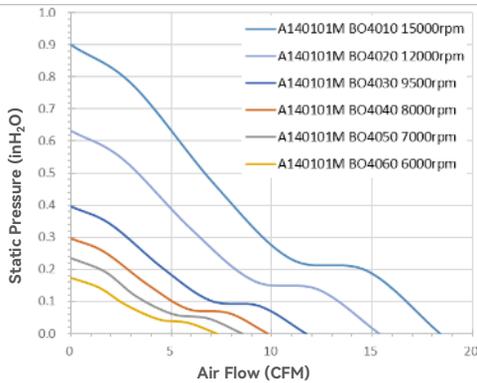

■ Dimensions drawing (mm)

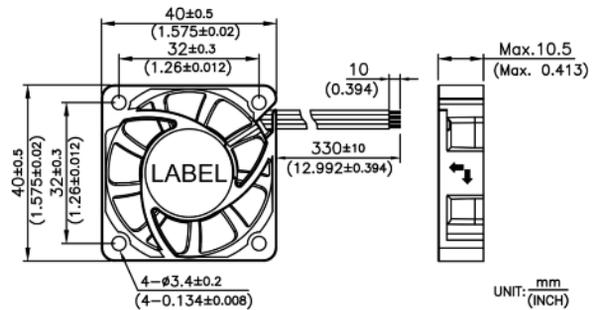


Model No.		Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise @1M
		VDC	VDC	°C				CFM	m ³ /min	inH ₂ O	mmH ₂ O	
A140100M	BO4010	5	3.5~5.5	-10~70	15000	1.107	5.53	18.4	0.52	0.90	22.9	47.9
A140100M	BO4020	5	3.5~5.5	-10~70	12000	0.540	2.70	15.4	0.44	0.63	16.0	44.1
A140100M	BO4030	5	3.5~5.5	-10~70	9500	0.276	1.38	11.7	0.31	0.40	10.0	40.8
A140100M	BO4040	5	3.5~5.5	-10~70	8000	0.204	1.02	9.8	0.28	0.30	7.5	36.4
A140100M	BO4050	5	3.5~5.5	-10~70	7000	0.149	0.74	8.6	0.24	0.24	6.0	32.1
A140100M	BO4060	5	3.5~5.5	-10~70	6000	0.115	0.58	7.3	0.21	0.17	4.4	28.6
A140101M	BO4010	12	7~13.8	-10~70	15000	0.461	5.53	18.4	0.52	0.90	22.9	47.9
A140101M	BO4020	12	7~13.8	-10~70	12000	0.225	2.70	15.4	0.44	0.63	16.0	44.1
A140101M	BO4030	12	7~13.8	-10~70	9500	0.115	1.38	11.7	0.33	0.40	10.0	40.8
A140101M	BO4040	12	7~13.8	-10~70	8000	0.085	1.02	9.8	0.28	0.30	7.5	36.4
A140101M	BO4050	12	7~13.8	-10~70	7000	0.062	0.74	8.6	0.24	0.24	6.0	32.1
A140101M	BO4060	12	7~13.8	-10~70	6000	0.048	0.58	7.3	0.21	0.17	4.4	28.6

Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.
<https://www.i-hzlw.com>




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Hydraulic bearings
- Control Options: +/-/FG/PWM
- Weight: 15.1 g

■ Air Flow-Static Pressure Characteristics

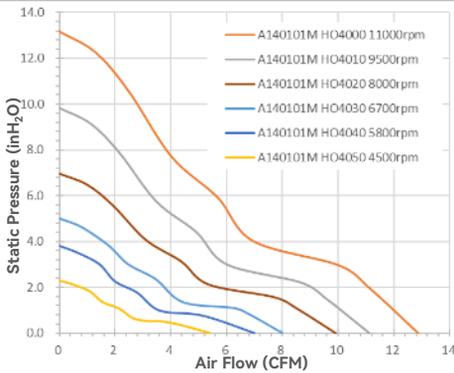

■ Dimensions drawing (mm)

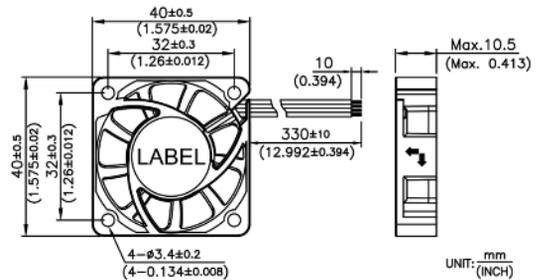


Model No.		Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise @1M
		VDC	VDC	°C				CFM	m ³ /min	inH ₂ O	mmH ₂ O	
A140100M	HO4000	5	3.5~6	-10~70	11000	0.427	2.14	12.9	0.36	0.52	13.18	41.9
A140100M	HO4010	5	3.5~6	-10~70	9500	0.276	1.38	11.1	0.31	0.39	9.83	38.7
A140100M	HO4020	5	3.5~6	-10~70	8000	0.200	1.00	9.9	0.28	0.27	6.97	33.5
A140100M	HO4030	5	3.5~6	-10~70	6700	0.124	0.62	8.0	0.23	0.20	5.00	29.3
A140100M	HO4040	5	3.5~6	-10~70	5800	0.096	0.48	7.0	0.20	0.15	3.80	25.2
A140100M	HO4050	5	3.5~6	-10~70	4500	0.076	0.38	5.4	0.15	0.09	2.29	21.6
A140101M	HO4000	12	7~13.8	-10~70	11000	0.178	2.14	12.9	0.36	0.52	13.18	41.9
A140101M	HO4010	12	7~13.8	-10~70	9500	0.115	1.38	11.1	0.31	0.39	9.83	38.7
A140101M	HO4020	12	7~13.8	-10~70	8000	0.083	1.00	9.9	0.28	0.27	6.97	33.5
A140101M	HO4030	12	7~13.8	-10~70	6700	0.052	0.62	8.0	0.23	0.20	5.00	29.3
A140101M	HO4040	12	7~13.8	-10~70	5800	0.040	0.48	7.0	0.20	0.15	3.80	25.2
A140101M	HO4050	12	7~13.8	-10~70	4500	0.032	0.38	5.4	0.15	0.09	2.29	21.6

Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.
<https://www.i-hzlw.com>




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Ball bearings
- Control Options: +/-/FG/PWM
- Weight: 38.1 g

■ Air Flow-Static Pressure Characteristics

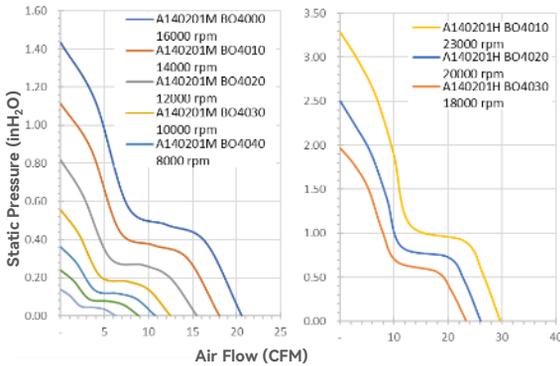

■ Dimensions drawing (mm)

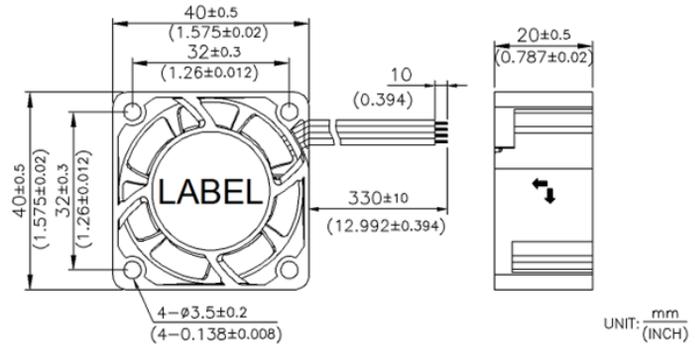

Model No.	Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise @1M	
							CFM	m ³ /min	inH ₂ O	mmH ₂ O		dB(A)
A140200M	BO4000	5	3.5~5.5	-10~70	16000	1.104	5.5	20.6	0.58	1.43	36.4	52.4
A140200M	BO4010	5	3.5~5.5	-10~70	14000	0.672	3.4	18.1	0.51	1.11	28.3	49.0
A140200M	BO4020	5	3.5~5.5	-10~70	12000	0.468	2.3	15.5	0.44	0.82	20.8	45.7
A140200M	BO4030	5	3.5~5.5	-10~70	10000	0.336	1.7	12.5	0.35	0.56	14.1	39.7
A140200M	BO4040	5	3.5~5.5	-10~70	8000	0.180	0.9	10.8	0.31	0.36	9.2	33.4
A140200M	BO4050	5	3.5~5.5	-10~70	6500	0.125	0.6	8.9	0.25	0.24	6.1	27.8
A140200M	BO4060	5	3.5~5.5	-10~70	5000	0.072	0.4	6.3	0.18	0.14	3.5	23.7
A140201H	BO4010	12	6~13.8	-10~70	23000	1.450	17.4	29.7	0.84	3.29	83.5	59.9
A140201H	BO4020	12	6~13.8	-10~70	20000	0.810	9.7	26.0	0.74	2.50	63.5	56.4
A140201H	BO4030	12	6~13.8	-10~70	18000	0.620	7.4	23.3	0.66	1.97	50.0	54.2
A140201M	BO4000	12	6~13.8	-10~70	16000	0.460	5.5	20.6	0.58	1.43	36.4	52.4
A140201M	BO4010	12	6~13.8	-10~70	14000	0.280	3.4	18.1	0.51	1.11	28.3	49.0
A140201M	BO4020	12	6~13.8	-10~70	12000	0.195	2.3	15.5	0.44	0.82	20.8	45.7
A140201M	BO4030	12	6~13.8	-10~70	10000	0.140	1.7	12.5	0.35	0.56	14.1	39.7
A140201M	BO4040	12	6~13.8	-10~70	8000	0.075	0.9	10.8	0.31	0.36	9.2	33.4
A140201M	BO4050	12	6~13.8	-10~70	6500	0.052	0.6	8.9	0.25	0.24	6.1	27.8
A140201M	BO4060	12	6~13.8	-10~70	5000	0.030	0.4	6.3	0.18	0.14	3.5	23.7

Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.
<https://www.i-hzlw.com>

DC Brushless Axial Fan


40X40X20 mm

iCOOL Fan Series
RoHS compliant




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Ball bearings
- Control Options: +/-/FG/PWM
- Weight: 38.1 g

■ Air Flow-Static Pressure Characteristics

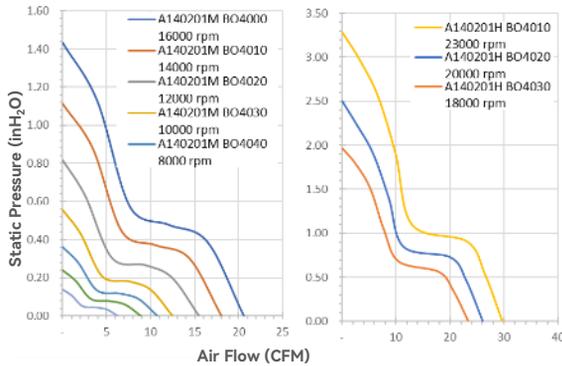

■ Dimensions drawing (mm)

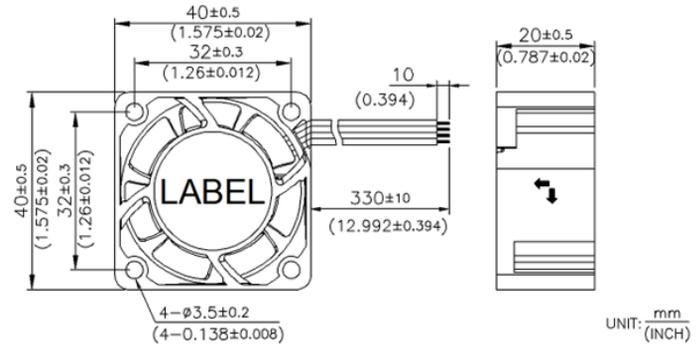

UNIT: $\frac{\text{mm}}{\text{(INCH)}}$


Model No.		Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise @1M
		VDC	VDC	°C				CFM	m ³ /min	inH ₂ O	mmH ₂ O	
A140202M	BO4000	24	14~27.6	-10~70	23000	0.725	17.4	29.7	0.84	3.29	83.5	59.9
A140202M	BO4010	24	14~27.6	-10~70	20000	0.405	9.7	26.0	0.74	2.50	63.5	56.4
A140202M	BO4020	24	14~27.6	-10~70	18000	0.310	7.4	23.3	0.66	1.97	50.0	54.2
A140202M	BO4030	24	14~27.6	-10~70	16000	0.230	5.5	20.6	0.58	1.43	36.4	52.4
A140202M	BO4040	24	14~27.6	-10~70	14000	0.140	3.4	18.1	0.51	1.11	28.3	49.0
A140202M	BO4050	24	14~27.6	-10~70	12000	0.098	2.3	15.5	0.44	0.82	20.8	45.7
A140202M	BO4060	24	14~27.6	-10~70	10000	0.070	1.7	12.5	0.35	0.56	14.1	39.7
A140202M	BO4070	24	14~27.6	-10~70	8000	0.038	0.9	10.8	0.31	0.36	9.2	33.4
A140202M	BO4080	24	14~27.6	-10~70	6500	0.026	0.6	8.9	0.25	0.24	6.1	27.8
A140202M	BO4090	24	14~27.6	-10~70	5000	0.015	0.4	6.3	0.18	0.14	3.5	23.7

Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.
<https://www.i-hzlw.com>




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Hydraulic bearings
- Control Options: +/-/FG/PWM
- Weight: 36.8 g

■ Air Flow-Static Pressure Characteristics

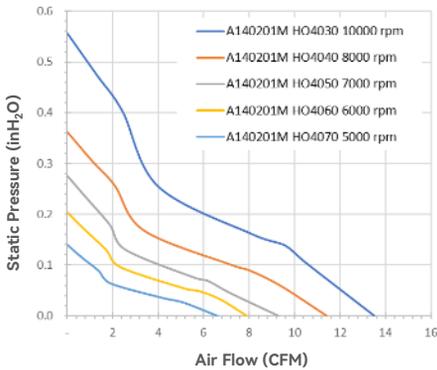

■ Dimensions drawing (mm)

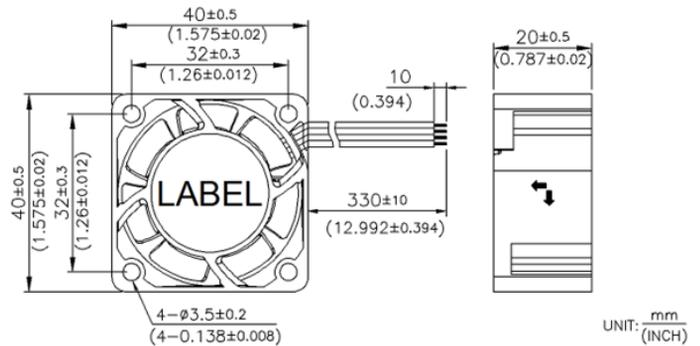


Model No.		Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise @1M
		VDC	VDC	°C				CFM	m ³ /min	inH ₂ O	mmH ₂ O	
A140200M	HO4040	5	3.5~6	-10~70	8000	0.408	2.04	11.4	0.323	0.36	9.2	33.6
A140200M	HO4050	5	3.5~6	-10~70	7000	0.336	1.68	9.3	0.271	0.28	7.0	29.5
A140200M	HO4060	5	3.5~6	-10~70	6000	0.300	1.50	7.9	0.232	0.20	5.2	24.9
A140200M	HO4070	5	3.5~6	-10~70	5000	0.204	1.02	6.6	0.194	0.14	3.5	19.5
A140201M	HO4030	12	6~13.8	-10~70	10000	0.322	3.87	13.5	0.383	0.56	14.1	39.5
A140201M	HO4040	12	6~13.8	-10~70	8000	0.170	2.04	11.4	0.323	0.36	9.2	33.6
A140201M	HO4050	12	6~13.8	-10~70	7000	0.140	1.68	9.3	0.271	0.28	7.0	29.5
A140201M	HO4060	12	6~13.8	-10~70	6000	0.125	1.50	7.9	0.232	0.20	5.2	24.9
A140201M	HO4070	12	6~13.8	-10~70	5000	0.085	1.02	6.6	0.194	0.14	3.5	19.5
A140202M	HO4030	24	14~27.6	-10~70	10000	0.161	3.87	13.5	0.383	0.56	14.1	39.5
A140202M	HO4040	24	14~27.6	-10~70	8000	0.085	2.04	11.4	0.323	0.36	9.2	33.6
A140202M	HO4050	24	14~27.6	-10~70	7000	0.070	1.68	9.3	0.271	0.28	7.0	29.5
A140202M	HO4060	24	14~27.6	-10~70	6000	0.063	1.50	7.9	0.232	0.20	5.2	24.9
A140202M	HO4070	24	14~27.6	-10~70	5000	0.043	1.02	6.6	0.194	0.14	3.5	19.5

Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.
<https://www.i-hzlw.com>




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Ball bearings
- Control Options: +/-/FG/PWM
- Weight: 34.1 g

■ Air Flow-Static Pressure Characteristics

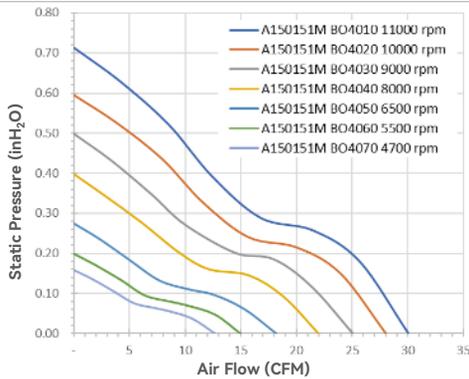

■ Dimensions drawing (mm)

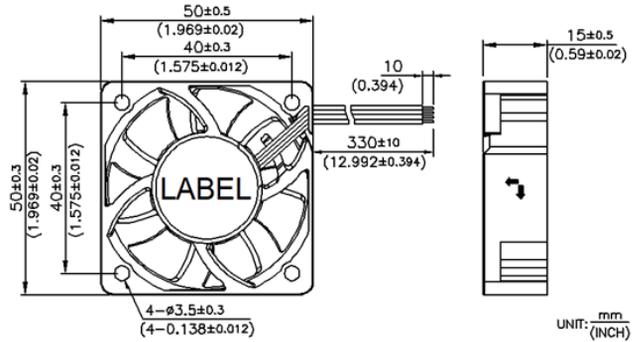


Model No.	Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise @1M
	VDC	VDC	°C	RPM	Amp	Watt	CFM	m ³ /min	inH ₂ O	mmH ₂ O	dB(A)
A150151M BO4010	12	6~13.8	-10~70	11000	0.380	4.56	30.0	0.85	0.71	18.1	49.6
A150151M BO4020	12	6~13.8	-10~70	10000	0.285	3.43	28.0	0.79	0.59	15.1	47.5
A150151M BO4030	12	6~13.8	-10~70	9000	0.208	2.50	25.1	0.71	0.50	12.6	45.2
A150151M BO4040	12	6~13.8	-10~70	8000	0.140	1.68	22.0	0.62	0.40	10.1	40.6
A150151M BO4050	12	6~13.8	-10~70	6500	0.101	1.21	18.2	0.52	0.27	7.0	34.7
A150151M BO4060	12	6~13.8	-10~70	5500	0.067	0.81	15.0	0.42	0.20	5.1	30.3
A150151M BO4070	12	6~13.8	-10~70	4700	0.048	0.58	12.7	0.36	0.16	4.0	26.9
A150152M BO4010	24	14~27.6	-10~70	11000	0.190	4.56	30.0	0.85	0.71	18.1	49.6
A150152M BO4020	24	14~27.6	-10~70	10000	0.143	3.43	28.0	0.79	0.59	15.1	47.5
A150152M BO4030	24	14~27.6	-10~70	9000	0.104	2.50	25.1	0.71	0.50	12.6	45.2
A150152M BO4040	24	14~27.6	-10~70	8000	0.070	1.68	22.0	0.62	0.40	10.1	40.6
A150152M BO4050	24	14~27.6	-10~70	6500	0.050	1.21	18.2	0.52	0.27	7.0	34.7
A150152M BO4060	24	14~27.6	-10~70	5500	0.034	0.81	15.0	0.42	0.20	5.1	30.3
A150152M BO4070	24	14~27.6	-10~70	4700	0.024	0.58	12.7	0.36	0.16	4.0	26.9

Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.
<https://www.i-hzlw.com>




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Hydraulic bearings
- Control Options: +/-/FG/PWM
- Weight: 32.8 g

■ Air Flow-Static Pressure Characteristics

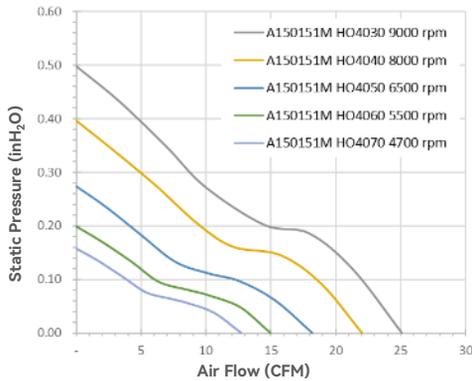

■ Dimensions drawing (mm)

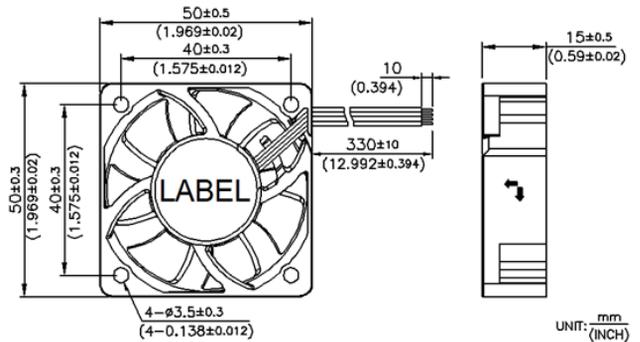


Model No.		Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise @1M
		VDC	VDC	°C				CFM	m ³ /min	inH ₂ O	mmH ₂ O	
A150151M	HO4030	12	6~13.8	-10~70	9000	0.486	5.83	25.1	0.71	0.50	12.6	43.2
A150151M	HO4040	12	6~13.8	-10~70	8000	0.290	3.48	22.0	0.62	0.40	10.1	38.6
A150151M	HO4050	12	6~13.8	-10~70	6500	0.200	2.40	18.2	0.52	0.27	7.0	32.7
A150151M	HO4060	12	6~13.8	-10~70	5500	0.120	1.44	15.0	0.42	0.20	5.1	28.3
A150151M	HO4070	12	6~13.8	-10~70	4700	0.070	0.84	12.7	0.36	0.16	4.0	24.9
A150152M	HO4030	24	14~27.6	-10~70	9000	0.243	5.83	25.1	0.71	0.50	12.6	43.2
A150152M	HO4040	24	14~27.6	-10~70	8000	0.145	3.48	22.0	0.62	0.40	10.1	38.6
A150152M	HO4050	24	14~27.6	-10~70	6500	0.100	2.40	18.2	0.52	0.27	7.0	32.7
A150152M	HO4060	24	14~27.6	-10~70	5500	0.060	1.44	15.0	0.42	0.20	5.1	28.3
A150152M	HO4070	24	14~27.6	-10~70	4700	0.035	0.84	12.7	0.36	0.16	4.0	24.9

Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.
<https://www.i-hzlw.com>




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Ball bearings
- Control Options: +/-/FG/PWM
- Weight: 70.5 g

■ Air Flow-Static Pressure Characteristics

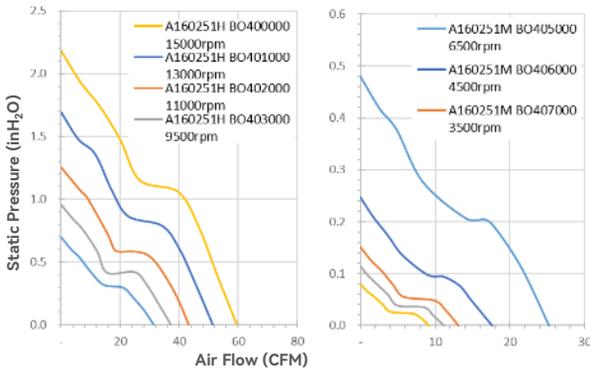

■ Dimensions drawing (mm)

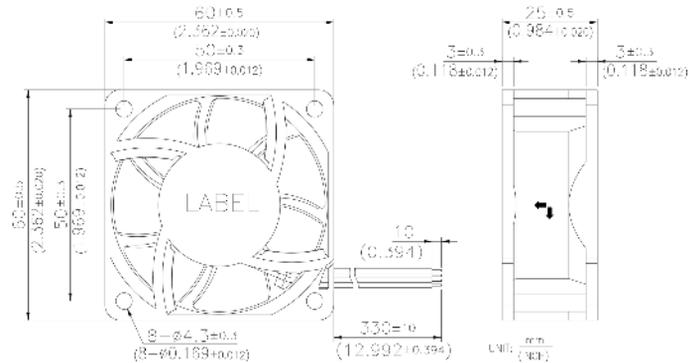


Model No.	Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise @1M
							CFM	m ³ /min	inH ₂ O	mmH ₂ O	
A160251H BO400000	12	7~13.8	-10~70	15000	1.450	17.40	59.65	1.69	2.18	55.49	59.4
A160251H BO401000	12	7~13.8	-10~70	13000	0.985	11.82	53.08	1.50	1.70	43.18	55.8
A160251H BO402000	12	7~13.8	-10~70	11000	0.565	6.78	43.24	1.22	1.22	30.92	52.7
A160251H BO403000	12	7~13.8	-10~70	9500	0.459	5.50	37.33	1.06	0.95	24.25	48.6
A160251H BO404000	12	7~13.8	-10~70	8000	0.330	3.96	31.48	0.89	0.70	17.67	44.2
A160251M BO405000	12	7~13.8	-10~70	6500	0.215	2.58	25.24	0.71	0.48	12.18	38.9
A160251M BO406000	12	7~13.8	-10~70	4500	0.073	0.87	17.63	0.50	0.25	6.29	29.4
A160251M BO407000	12	7~13.8	-10~70	3500	0.051	0.61	14.70	0.42	0.15	3.82	25.5
A160251M BO408000	12	7~13.8	-10~70	3000	0.036	0.44	10.93	0.31	0.11	2.81	22.7
A160251M BO409000	12	7~13.8	-10~70	2500	0.029	0.35	8.97	0.25	0.08	2.02	19.8
A160252M BO400000	24	14~27.6	-10~70	15000	0.725	17.40	59.65	1.69	2.18	55.49	59.4
A160252M BO401000	24	14~27.6	-10~70	13000	0.493	11.82	53.08	1.50	1.70	43.18	55.8
A160252M BO402000	24	14~27.6	-10~70	11000	0.283	6.78	43.24	1.22	1.22	30.92	52.7
A160252M BO403000	24	14~27.6	-10~70	9500	0.229	5.50	37.33	1.06	0.95	24.25	48.6
A160252M BO404000	24	14~27.6	-10~70	8000	0.165	3.96	31.48	0.89	0.70	17.67	44.2
A160252M BO405000	24	14~27.6	-10~70	6500	0.108	2.58	25.24	0.71	0.48	12.18	38.9

Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.
<https://www.i-hzlw.com>




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Ball bearings
- Control Options: +/-/FG/PWM
- Weight: 75 g

■ Air Flow-Static Pressure Characteristics

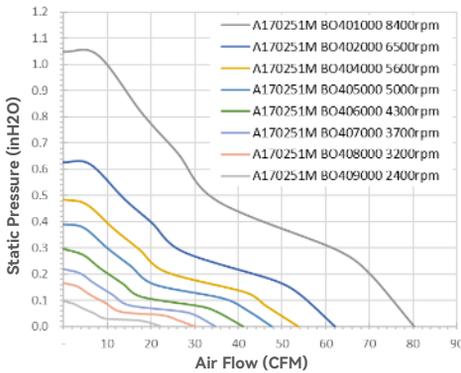

■ Dimensions drawing (mm)

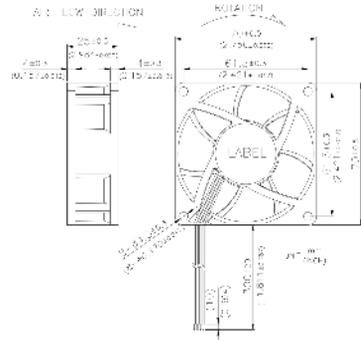


Model No.		Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise @1M
		VDC	VDC	°C	RPM	Amp	Watt	CFM	m ³ /min	inH ₂ O	mmH ₂ O	dB(A)
A170251M	BO401000	12	7~13.8	-10~70	8400	1.223	14.7	80.3	2.27	1.05	26.63	54.4
A170251M	BO402000	12	7~13.8	-10~70	6500	0.567	6.8	62.1	1.76	0.63	15.94	48.8
A170251M	BO404000	12	7~13.8	-10~70	5600	0.342	4.1	53.8	1.52	0.48	12.31	44.7
A170251M	BO405000	12	7~13.8	-10~70	5000	0.267	3.2	47.7	1.35	0.39	9.89	41.2
A170251M	BO406000	12	7~13.8	-10~70	4300	0.183	2.2	41.1	1.16	0.30	7.50	36.1
A170251M	BO407000	12	7~13.8	-10~70	3700	0.120	1.43	34.8	0.99	0.22	5.58	32.8
A170251M	BO408000	12	7~13.8	-10~70	3200	0.092	1.10	30.0	0.85	0.17	4.22	29.6
A170251M	BO409000	12	7~13.8	-10~70	2400	0.043	0.51	22.4	0.63	0.10	2.46	21.2
A170252M	BO401000	24	14~27.6	-10~70	8400	0.611	14.7	80.3	2.27	1.05	26.63	54.4
A170252M	BO402000	24	14~27.6	-10~70	6500	0.283	6.8	62.1	1.76	0.63	15.94	48.8
A170252M	BO404000	24	14~27.6	-10~70	5600	0.171	4.1	53.8	1.52	0.48	12.31	44.7
A170252M	BO405000	24	14~27.6	-10~70	5000	0.133	3.2	47.7	1.35	0.39	9.89	41.2
A170252M	BO406000	24	14~27.6	-10~70	4300	0.092	2.2	41.1	1.16	0.30	7.50	36.1
A170252M	BO407000	24	14~27.6	-10~70	3700	0.060	1.43	34.8	0.99	0.22	5.58	32.8
A170252M	BO408000	24	14~27.6	-10~70	3200	0.046	1.10	30.0	0.85	0.17	4.22	29.6
A170252M	BO409000	24	14~27.6	-10~70	2400	0.021	0.51	22.4	0.63	0.10	2.46	21.2

Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.
<https://www.i-hzlw.com>




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Hydraulic bearings
- Control Options: +/-/FG/PWM
- Weight: 75 g

■ Air Flow-Static Pressure Characteristics

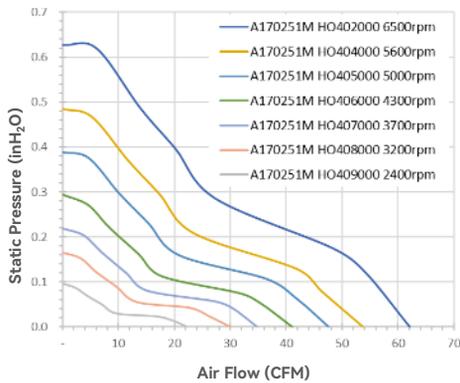

■ Dimensions drawing (mm)

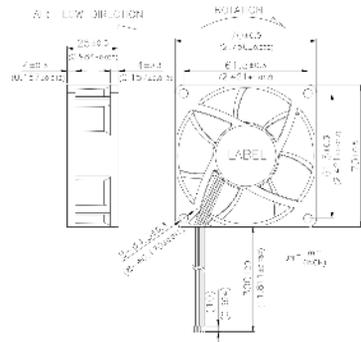


Model No.	Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise @1M
	VDC	VDC	°C	RPM	Amp	Watt	CFM	m ³ /min	inH ₂ O	mmH ₂ O	dB(A)
A170251M HO402000	12	7~13.8	-10~70	6500	0.567	6.8	62.1	1.76	0.63	15.94	48.8
A170251M HO404000	12	7~13.8	-10~70	5600	0.342	4.1	53.8	1.52	0.48	12.31	44.7
A170251M HO405000	12	7~13.8	-10~70	5000	0.267	3.2	47.7	1.35	0.39	9.89	41.2
A170251M HO406000	12	7~13.8	-10~70	4300	0.183	2.2	41.1	1.16	0.30	7.50	36.1
A170251M HO407000	12	7~13.8	-10~70	3700	0.120	1.43	34.8	0.99	0.22	5.58	32.8
A170251M HO408000	12	7~13.8	-10~70	3200	0.092	1.10	30.0	0.85	0.17	4.22	29.6
A170251M HO409000	12	7~13.8	-10~70	2400	0.043	0.51	22.4	0.63	0.10	2.46	21.2
A170252M HO402000	24	14~27.6	-10~70	6500	0.283	6.8	62.1	1.76	0.63	15.94	48.8
A170252M HO404000	24	14~27.6	-10~70	5600	0.171	4.1	53.8	1.52	0.48	12.31	44.7
A170252M HO405000	24	14~27.6	-10~70	5000	0.133	3.2	47.7	1.35	0.39	9.89	41.2
A170252M HO406000	24	14~27.6	-10~70	4300	0.092	2.2	41.1	1.16	0.30	7.50	36.1
A170252M HO407000	24	14~27.6	-10~70	3700	0.060	1.43	34.8	0.99	0.22	5.58	32.8
A170252M HO408000	24	14~27.6	-10~70	3200	0.046	1.10	30.0	0.85	0.17	4.22	29.6
A170252M HO409000	24	14~27.6	-10~70	2400	0.021	0.51	22.4	0.63	0.10	2.46	21.2

Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.
<https://www.i-hzlw.com>




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Ball bearings
- Control Options: +/-/FG/PWM
- Weight: 82.5 g

■ Air Flow-Static Pressure Characteristics

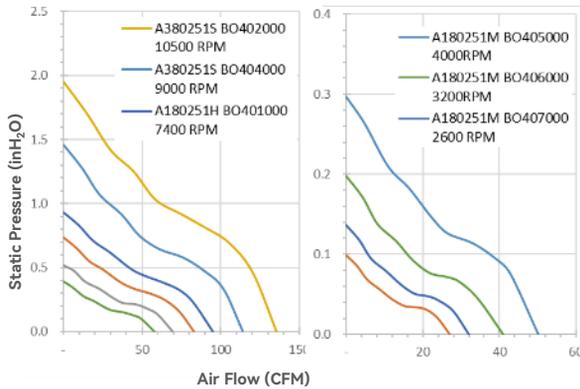

■ Dimensions drawing (mm)

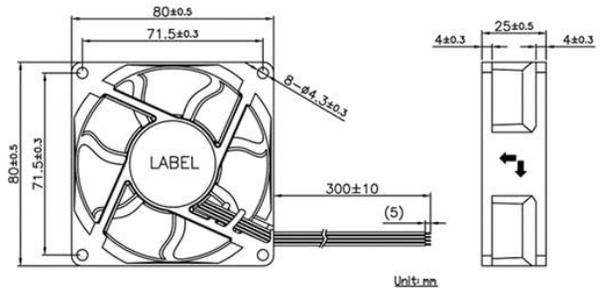


Model No.		Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise @1M
		VDC	VDC	°C				CFM	m ³ /min	inH ₂ O	mmH ₂ O	
A380251S	BO402000	12	7~13.8	-10~70	10500	3.10	37.20	138.5	3.92	2.02	51.4	64.3
A180251H	BO404000	12	7~13.8	-10~70	9000	1.84	22.12	113.9	3.22	1.45	37.0	62.9
A180251H	BO401000	12	7~13.8	-10~70	7400	1.20	14.40	94.8	2.68	0.93	23.6	58.6
A180251H	BO402000	12	7~13.8	-10~70	6500	0.77	9.27	83.1	2.35	0.74	18.7	53.1
A180251H	BO403000	12	7~13.8	-10~70	5500	0.474	5.68	69.3	1.96	0.52	13.1	51.5
A180251H	BO404000	12	7~13.8	-10~70	4600	0.264	3.16	57.7	1.63	0.39	10.0	43.3
A180251M	BO405000	12	7~13.8	-10~70	4000	0.198	2.38	50.2	1.42	0.30	7.5	39.5
A180251M	BO406000	12	7~13.8	-10~70	3200	0.110	1.33	41.0	1.16	0.20	5.0	33.5
A180251M	BO407000	12	7~13.8	-10~70	2600	0.060	0.72	32.0	0.91	0.14	3.5	28.3
A180251M	BO408000	12	7~13.8	-10~70	2200	0.044	0.52	27.0	0.76	0.10	2.5	24.0

Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.
<https://www.i-hzlw.com>




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Ball bearings
- Control Options: +/-/FG/PWM
- Weight: 82.5 g

■ Air Flow-Static Pressure Characteristics

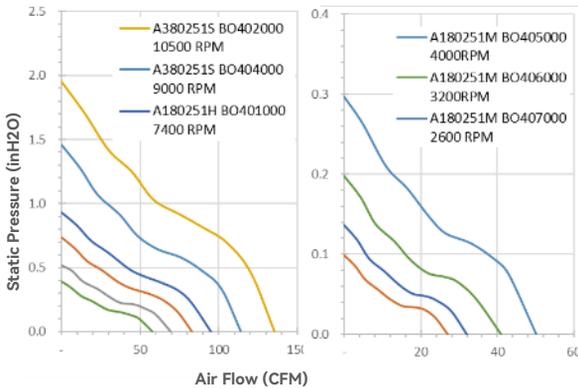

■ Dimensions drawing (mm)

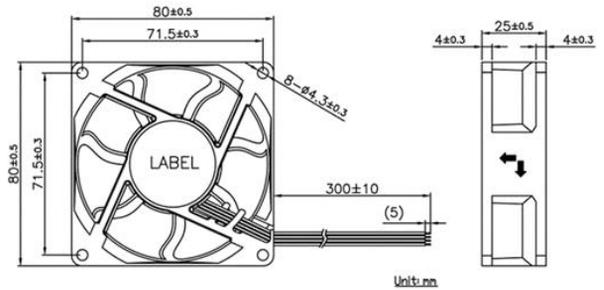


Model No.	Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise @1M
	VDC	VDC	°C	RPM	Amp	Watt	CFM	m ³ /min	inH ₂ O	mmH ₂ O	dB(A)
A180252H BO400000	24	14~27.6	-10~70	10500	1.55	37.20	138.5	3.92	2.02	51.4	64.3
A180252H BO401000	24	14~27.6	-10~70	9000	0.92	22.12	113.9	3.22	1.45	37.0	62.9
A180252H BO402000	24	14~27.6	-10~70	7400	0.600	14.40	94.8	2.68	0.93	23.6	58.6
A180252H BO403000	24	14~27.6	-10~70	6500	0.386	9.27	83.1	2.35	0.74	18.7	53.1
A180252H BO404000	24	14~27.6	-10~70	5500	0.237	5.68	69.3	1.96	0.52	13.1	51.5
A180252H BO405000	24	14~27.6	-10~70	4600	0.132	3.16	57.7	1.63	0.39	10.0	43.3
A180252H BO406000	24	14~27.6	-10~70	4000	0.099	2.38	50.2	1.42	0.30	7.5	39.5
A180252H BO407000	24	14~27.6	-10~70	3200	0.055	1.33	41.0	1.16	0.20	5.0	33.5
A180252H BO408000	24	14~27.6	-10~70	2600	0.030	0.72	32.0	0.91	0.14	3.5	28.3
A180252H BO409000	24	14~27.6	-10~70	2200	0.022	0.52	27.0	0.76	0.10	2.5	24.0

Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.
<https://www.i-hzlw.com>




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Hydraulic bearings
- Control Options: +/-/FG/PWM
- Weight: 82.5 g

■ Air Flow-Static Pressure Characteristics

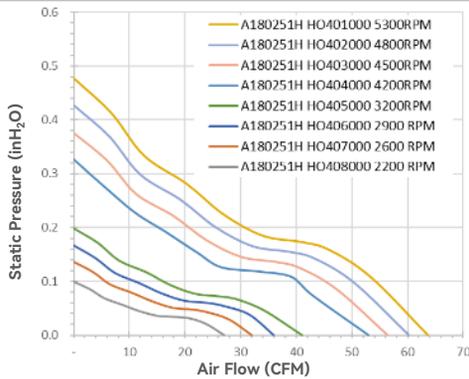

■ Dimensions drawing (mm)

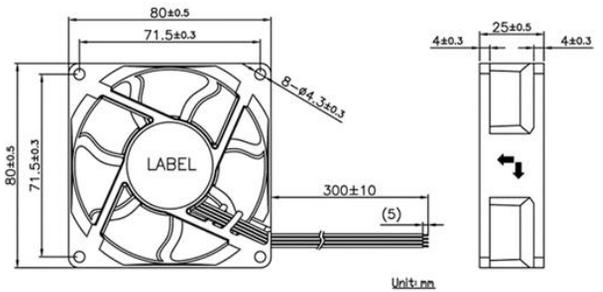


Model No.	Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise @1M	
	VDC	VDC	°C	RPM	Amp	Watt	CFM	m ³ /min	inH ₂ O	mmH ₂ O	dB(A)	
A180251H	HO401000	12	7~13.8	-10~70	5300	0.500	6.00	63.7	1.80	0.48	12.1	47.6
A180251H	HO402000	12	7~13.8	-10~70	4800	0.371	4.46	60.2	1.70	0.43	10.9	44.5
A180251H	HO403000	12	7~13.8	-10~70	4500	0.306	3.67	56.4	1.60	0.38	9.5	42.5
A180251H	HO404000	12	7~13.8	-10~70	4200	0.249	2.99	53.0	1.50	0.33	8.3	41.0
A180251H	HO405000	12	7~13.8	-10~70	3200	0.185	2.22	41.0	1.16	0.20	5.0	32.9
A180251H	HO406000	12	7~13.8	-10~70	2900	0.092	1.10	35.9	1.02	0.17	4.2	29.8
A180251H	HO407000	12	7~13.8	-10~70	2600	0.065	0.78	32.0	0.91	0.14	3.5	27.3
A180251H	HO408000	12	7~13.8	-10~70	2200	0.042	0.50	27.0	0.76	0.10	2.5	23.0
A180252H	HO401000	24	14~27.6	-10~70	5300	0.250	6.00	63.7	1.80	0.48	12.1	47.6
A180252H	HO402000	24	14~27.6	-10~70	4800	0.186	4.46	60.2	1.70	0.43	10.9	44.5
A180252H	HO403000	24	14~27.6	-10~70	4500	0.153	3.67	56.4	1.60	0.38	9.5	42.5
A180252H	HO404000	24	14~27.6	-10~70	4200	0.124	2.99	50.2	1.42	0.33	8.3	41.0
A180252H	HO405000	24	14~27.6	-10~70	3200	0.093	2.22	41.0	1.16	0.20	5.0	32.9
A180252H	HO406000	24	14~27.6	-10~70	2900	0.046	1.10	35.9	1.02	0.17	4.2	29.8
A180252H	HO407000	24	14~27.6	-10~70	2600	0.033	0.78	32.0	0.91	0.14	3.5	27.3
A180252H	HO408000	24	14~27.6	-10~70	2200	0.021	0.50	27.0	0.76	0.10	2.5	23.0

Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.
<https://www.i-hzlw.com>




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Ball bearings
- Control Options: +/-/FG/PWM
- Weight: 103 g

■ Air Flow-Static Pressure Characteristics

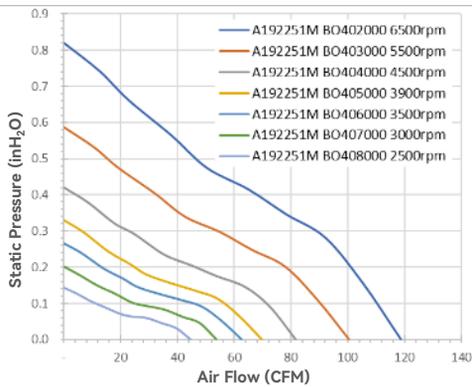

■ Dimensions drawing (mm)

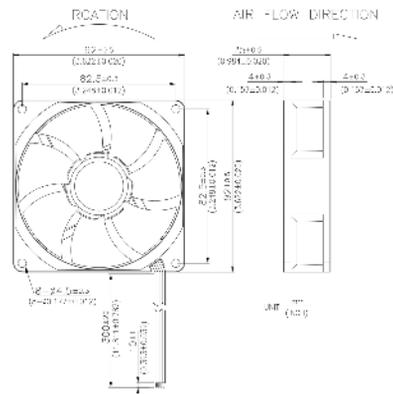


Model No.		Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise @1M
		VDC	VDC	°C				CFM	m ³ /min	inH ₂ O	mmH ₂ O	
A192251M	BO402000	12	7~13.8	-10~70	6500	1.459	17.5	118.7	3.36	0.82	20.8	57.8
A192251M	BO403000	12	7~13.8	-10~70	5500	0.884	10.6	100.4	2.84	0.59	14.9	51.0
A192251M	BO404000	12	7~13.8	-10~70	4500	0.424	5.1	81.7	2.31	0.42	10.7	46.5
A192251M	BO405000	12	7~13.8	-10~70	3900	0.272	3.3	69.8	1.97	0.33	8.4	42.0
A192251M	BO406000	12	7~13.8	-10~70	3500	0.197	2.4	62.6	1.77	0.27	6.7	38.4
A192251M	BO407000	12	7~13.8	-10~70	3000	0.133	1.6	53.6	1.52	0.20	5.1	36.0
A192251M	BO408000	12	7~13.8	-10~70	2500	0.090	1.1	44.6	1.26	0.13	3.3	32.0
A192252M	BO402000	24	14~27.6	-10~70	6500	0.729	17.5	118.7	3.36	0.82	20.8	57.8
A192252M	BO403000	24	14~27.6	-10~70	5500	0.442	10.6	100.4	2.84	0.59	14.9	51.0
A192252M	BO404000	24	14~27.6	-10~70	4500	0.212	5.1	81.7	2.31	0.42	10.7	46.5
A192252M	BO405000	24	14~27.6	-10~70	3900	0.136	3.3	69.8	1.97	0.33	8.4	42.0
A192252M	BO406000	24	14~27.6	-10~70	3500	0.098	2.4	62.6	1.77	0.27	6.7	38.4
A192252M	BO407000	24	14~27.6	-10~70	3000	0.066	1.6	53.6	1.52	0.20	5.1	36.0
A192252M	BO408000	24	14~27.6	-10~70	2500	0.045	1.1	44.6	1.26	0.13	3.3	32.0

Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.
<https://www.i-hzlw.com>




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Hydraulic bearings
- Control Options: +/-/FG/PWM
- Weight: 103 g

■ Air Flow-Static Pressure Characteristics

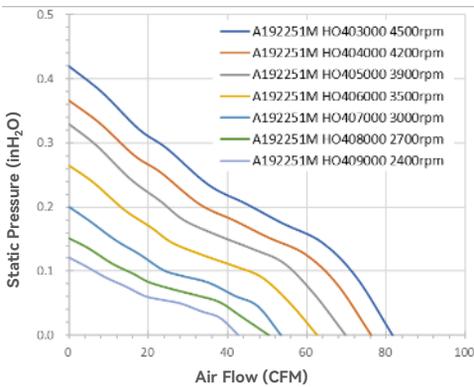

■ Dimensions drawing (mm)

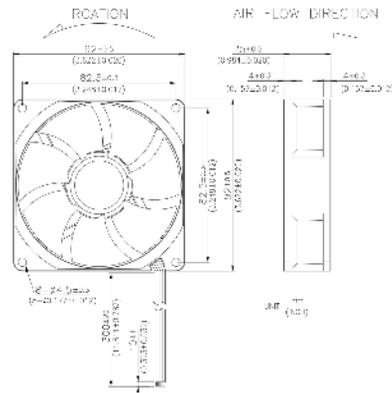


Model No.	Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise @1M
	VDC	VDC	°C	RPM	Amp	Watt	CFM	m ³ /min	inH ₂ O	mmH ₂ O	dB(A)
A192251M HO403000	12	6.5~13.2	-10~70	4500	0.475	5.7	81.7	2.31	0.42	10.7	45.5
A192251M HO404000	12	6.5~13.2	-10~70	4200	0.417	5.0	76.2	2.16	0.37	9.3	43.6
A192251M HO405000	12	6.5~13.2	-10~70	3900	0.367	4.4	69.8	1.97	0.33	8.4	41.4
A192251M HO406000	12	6.5~13.2	-10~70	3500	0.265	3.2	62.6	1.77	0.27	6.7	38.4
A192251M HO407000	12	6.5~13.2	-10~70	3000	0.167	2.0	53.6	1.52	0.20	5.1	34.0
A192251M HO408000	12	6.5~13.2	-10~70	2700	0.122	1.5	50.5	1.43	0.16	4.1	32.0
A192251M HO409000	12	6.5~13.2	-10~70	2400	0.090	1.1	42.8	1.21	0.12	3.1	28.0
A192252M HO403000	24	14~27.6	-10~70	4500	0.238	5.7	81.7	2.31	0.42	10.7	45.5
A192252M HO404000	24	14~27.6	-10~70	4200	0.208	5.0	76.2	2.16	0.37	9.3	43.6
A192252M HO405000	24	14~27.6	-10~70	3900	0.183	4.4	69.8	1.97	0.33	8.4	41.4
A192252M HO406000	24	14~27.6	-10~70	3500	0.133	3.2	62.6	1.77	0.27	6.7	38.4
A192252M HO407000	24	14~27.6	-10~70	3000	0.083	2.0	53.6	1.52	0.20	5.1	34.0
A192252M HO408000	24	14~27.6	-10~70	2700	0.061	1.5	50.5	1.43	0.16	4.1	32.0
A192252M HO409000	24	14~27.6	-10~70	2400	0.045	1.1	42.8	1.21	0.12	3.1	28.0

Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.
<https://www.i-hzlw.com>




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Ball bearings
- Control Options: +/-/FG/PWM
- Weight: 195 g

■ Air Flow-Static Pressure Characteristics

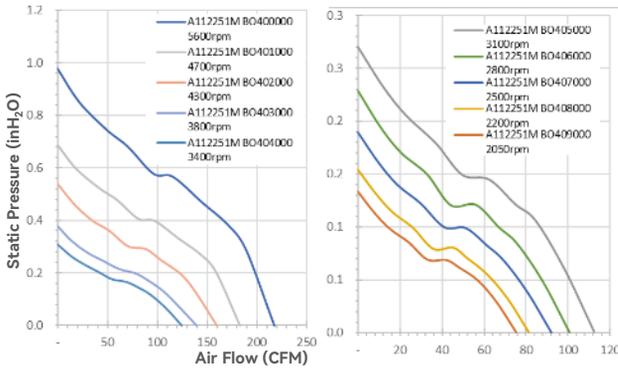

■ Dimensions drawing (mm)

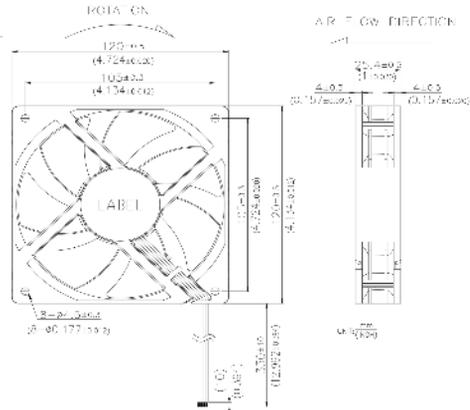

Model No.	Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise @1M
	VDC	VDC	°C	RPM	Amp	Watt	CFM	m ³ /min	inH ₂ O	mmH ₂ O	
A112251M BO400000	12	7~13.8	10~70	5600	2.208	26.5	217.7	6.16	0.98	24.8	60.6
A112251M BO401000	12	7~13.8	10~70	4700	1.305	15.7	182.7	5.17	0.69	17.5	57.2
A112251M BO402000	12	7~13.8	10~70	4300	1.040	12.5	159.7	4.52	0.54	13.7	54.2
A112251M BO403000	12	7~13.8	10~70	3800	0.667	8.0	139.2	3.94	0.38	9.6	51.0
A112251M BO404000	12	7~13.8	10~70	3400	0.480	5.8	124.2	3.51	0.31	7.8	48.7
A112251M BO405000	12	7~13.8	10~70	3100	0.378	4.5	112.4	3.18	0.27	6.9	46.1
A112251M BO406000	12	7~13.8	10~70	2800	0.273	3.3	100.8	2.85	0.23	5.8	42.5
A112251M BO407000	12	7~13.8	10~70	2500	0.230	2.8	92.0	2.60	0.19	4.8	39.3
A112251M BO408000	12	7~13.8	10~70	2200	0.169	2.0	81.2	2.30	0.15	3.9	35.7
A112251M BO409000	12	7~13.8	10~70	2050	0.143	1.7	75.4	2.13	0.13	3.4	33.7
A112252M BO400000	24	14~27.6	10~70	5600	1.104	26.5	217.7	6.16	0.98	24.8	60.6
A112252M BO401000	24	14~27.6	10~70	4700	0.653	15.7	182.7	5.17	0.69	17.5	57.2
A112252M BO402000	24	14~27.6	10~70	4300	0.520	12.5	159.7	4.52	0.54	13.7	54.2
A112252M BO403000	24	14~27.6	10~70	3800	0.333	8.0	139.2	3.94	0.38	9.6	51.0
A112252M BO404000	24	14~27.6	10~70	3400	0.240	5.8	124.2	3.51	0.31	7.8	48.7
A112252M BO405000	24	14~27.6	10~70	3100	0.189	4.5	112.4	3.18	0.27	6.9	46.1
A112252M BO406000	24	14~27.6	10~70	2800	0.136	3.3	100.8	2.85	0.23	5.8	42.5

Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.
<https://www.i-hzlw.com>

HUAZHUN

Stay Cool. Stay Ahead.

Huazhun Tech Co., Ltd

<https://www.i-hzlw.com>

huazhun@i-huazhun.com

ADD: 2F.-1, No. 110, Sanduo 4th Rd., Lingya Dist., Kaohsiung City 802, Taiwan

TEL: +886-7-2692979



WEBSITE