

DC Brushless Fan

60X60X56 mm


Dual Fan

iCLOUD Fan Series
RoHS compliant




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Ball bearings
- Control Options: +/-/FG/PWM
- Weight: 190 g
- Lead Wires : UL10368 AWG22 OR Equivalent

■ Air Flow-Static Pressure Characteristics

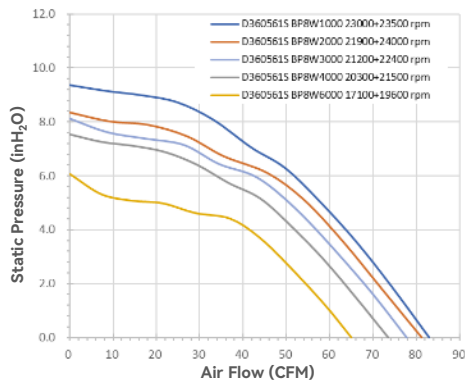

■ Dimensions drawing (mm)

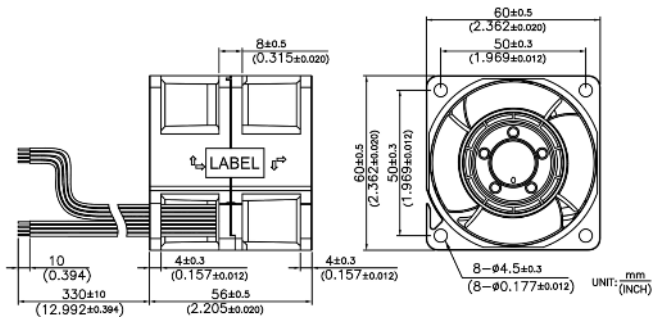

Model No.		Rated Voltage	Operating Voltage Range	Operating Temp.	Speed		Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise @1M
		VDC	VDC	°C	RPM		Amp	Watt	CFM	m ³ /min	inH ₂ O	mmH ₂ O	dB(A)
D360561S	BP8W1000	12	10.8~13.2	-10~70	23000	23500	4.41	52.9	83.0	2.3	9.4	238	81.3
D360561S	BP8W2000	12	10.8~13.2	-10~70	21900	24000	4.25	51.0	81.3	2.3	8.3	212	80.1
D360561S	BP8W3000	12	10.8~13.2	-10~70	21200	22400	3.73	44.7	77.7	2.2	8.1	206	79.5
D360561S	BP8W4000	12	10.8~13.2	-10~70	20300	21500	3.18	38.1	73.6	2.1	7.5	191	78.8
D360561S	BP8W6000	12	10.8~13.2	-10~70	17100	19600	2.11	25.4	65.0	1.8	6.1	154	75.5
D160564S	BP8W1000	48	36~57	-10~70	23000	23500	1.14	54.5	83.0	2.3	9.4	238	81.3
D160564S	BP8W2000	48	36~57	-10~70	21900	24000	1.09	52.5	81.3	2.3	8.3	212	80.1
D160564S	BP8W3000	48	36~57	-10~70	21200	22400	0.96	46.0	77.7	2.2	8.1	206	79.5
D160564S	BP8W4000	48	36~57	-10~70	20300	21500	0.82	39.2	73.6	2.1	7.5	191	78.8
D160564S	BP8W6000	48	36~57	-10~70	17100	19600	0.54	26.1	65.0	1.8	6.1	154	75.5

Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.
<https://www.i-hzlw.com>