

DC Brushless Fan

92X92X38 mm


iCLOUD Fan Series

RoHS compliant




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Ball bearings
- Control Options: +/-/FG/PWM
- Weight: 260 g
- Lead Wires : UL10368 AWG22 OR Equivalent

■ Air Flow-Static Pressure Characteristics

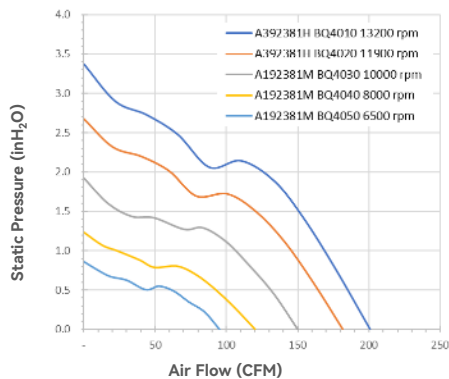

■ Dimensions drawing (mm)

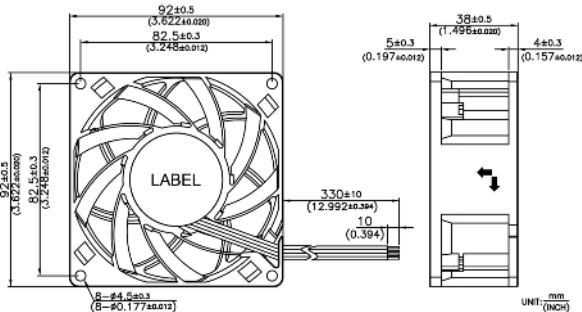

Model No.		Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise @1M
		VDC	VDC	°C	RPM	Amp	Watt	CFM	m ³ /min	inH ₂ O	mmH ₂ O	dB(A)
A392381H	BQ4010	12	10.8~13.2	-10~70	13200	5.61	67.3	201.0	5.7	3.37	85.6	71.9
A392381H	BQ4020	12	10.8~13.2	-10~70	11900	4.10	49.2	181.8	5.1	2.67	67.8	69.0
A192381M	BQ4030	12	6.5~13.2	-10~70	10000	2.40	28.8	149.6	4.2	1.92	48.7	62.0
A192381M	BQ4040	12	6.5~13.2	-10~70	8000	1.17	14.0	120.2	3.4	1.23	31.2	58.2
A192381M	BQ4050	12	6.5~13.2	-10~70	6500	0.63	7.5	95.3	2.7	0.86	21.8	52.9
A392382H	BQ4010	24	21.6~26.4	-10~70	13200	2.81	67.3	201.0	5.7	3.37	85.6	71.9
A392382H	BQ4020	24	21.6~26.4	-10~70	11900	2.05	49.2	181.8	5.1	2.67	67.8	69.0
A192382M	BQ4030	24	21.6~26.4	-10~70	10000	1.20	28.8	149.6	4.2	1.92	48.7	62.0
A192382M	BQ4040	24	21.6~26.4	-10~70	8000	0.58	14.0	120.2	3.4	1.23	31.2	58.2
A192382M	BQ4050	24	21.6~26.4	-10~70	6500	0.31	7.5	95.3	2.7	0.86	21.8	52.9
A192384H	BQ4010	48	36~57	-10~70	13200	1.40	67.3	201.0	5.7	3.37	85.6	71.9
A192384H	BQ4020	48	36~57	-10~70	11900	1.03	49.2	181.8	5.1	2.67	67.8	69.0
A192384H	BQ4030	48	36~57	-10~70	10000	0.60	28.8	149.6	4.2	1.92	48.7	62.0
A192384H	BQ4040	48	36~57	-10~70	8000	0.29	14.0	120.2	3.4	1.23	31.2	58.2
A192384H	BQ4050	48	36~57	-10~70	6500	0.16	7.5	95.3	2.7	0.86	21.8	52.9

Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.
<https://www.i-hzlw.com>