


DC Brushless Fan


25X25X10 mm

iCOOL Fan Series
RoHS compliant




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Hydraulic bearings
- Control Options: +/-/FG/PWM
- Weight: 7.7 g

■ Air Flow-Static Pressure Characteristics

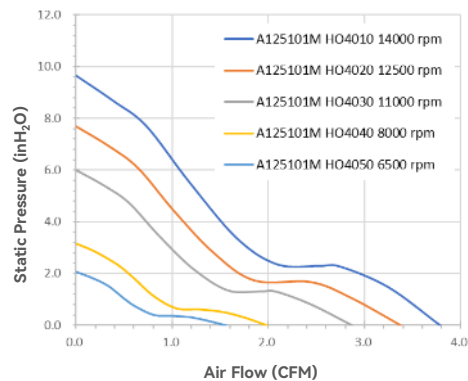

■ Dimensions drawing (mm)

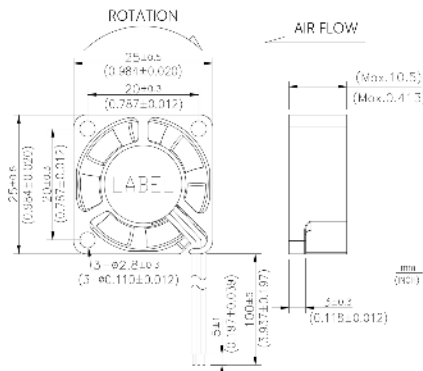

Model No.		Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise @1M
		VDC	VDC	°C	RPM	Amp	Watt	CFM	m ³ /min	inH ₂ O	mmH ₂ O	dB(A)
A125100M	HO4010	5	3.5~5.5	-10~70	14000	0.178	0.89	3.78	0.11	0.38	9.66	31.4
A125100M	HO4020	5	3.5~5.5	-10~70	12500	0.126	0.63	3.27	0.09	0.30	7.74	27.5
A125100M	HO4030	5	3.5~5.5	-10~70	11000	0.111	0.55	2.87	0.08	0.24	5.99	25.4
A125100M	HO4040	5	3.5~5.5	-10~70	8000	0.062	0.31	1.98	0.06	0.12	3.16	19.4
A125100M	HO4050	5	3.5~5.5	-10~70	6500	0.049	0.24	1.56	0.04	0.08	2.07	16.7
A125101M	HO4010	12	7~13.8	-10~70	14000	0.074	0.89	3.78	0.11	0.38	9.66	31.4
A125101M	HO4020	12	7~13.8	-10~70	12500	0.053	0.63	3.27	0.09	0.30	7.74	27.5
A125101M	HO4030	12	7~13.8	-10~70	11000	0.046	0.55	2.87	0.08	0.24	5.99	25.4
A125101M	HO4040	12	7~13.8	-10~70	8000	0.026	0.31	1.98	0.06	0.12	3.16	19.4
A125101M	HO4050	12	7~13.8	-10~70	6500	0.020	0.24	1.56	0.04	0.08	2.07	16.7

Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.
<https://www.i-hzlw.com>